

Lighting Catalogue

2026-2027

prolux[™]
lighting

Downlights	4
Buttons & Battens	11
Residential Spot Lights	13
Linear	17
Indoor Wall Lights	24
Stair Lights	27
Outdoor	28
Commercial	43
Lamps & Drivers	51
Index	54



Indoor

COB DOWNLIGHTS

A more versatile and architectural type of lighting.

The use of reflectors provides different beam spreads and focussing which allows for more sophisticated lighting design.

WELLINGTON

DL22 IP40 Aluminium
Colour: White, Black



Adjustable 30° tilt
240V 10W CCT 3K,4K,5K Selectable LED
Triac dimmable
Output: 800 lumen CRI90
Beam angle: 36°
Size: 85Ø*80H
Cutout: 75Ø
Classification: IC-F



WAIOURU

DL24 IP40 Aluminium
Colour: White, Black



Adjustable 30° tilt
240V 13W CCT 3K,4K,5K Selectable LED
Triac dimmable
Output: 950 lumen CRI90
Beam angle: 36°
Size: 100Ø*94H
Cutout: 90Ø
Classification: IC-F



TAUPO

DL17 IP40 Aluminium
Colour: White, Black



Fixed beam anti glare
240V 10W CCT 3K,4K,5K Selectable LED
Triac dimmable
Output: 800 lumen CRI90
Beam angle: 36°
Size: 80Ø*87H
Cutout: 75Ø
Classification: IC-F



COROGLEN

DL350 IP44 Aluminium
Colour: White



240V 10W 3K LED
Triac dimmable
Beam angle: 36°
Output: 900 lumen, CRI80
UGR: <16
Size: 90mm Ø*70H
Cutout: 75mmØ
Classification: IC-F

TE KOUMA

CL350 IP54 (Front Face) Aluminium
Colour: White



Adjustable 25° tilt
240V 8W 3K,4K,5K Selectable LED
Triac dimmable
Output: 620-690 lumen, CRI90
Beam angle: 36°
Size: 90mm Ø*67H
Cutout: 75-83mmØ
Classification: IC-F



PICTON

DL77 IP20 Aluminium
Colour: White, Black



Tilt 90° swivel 350°
240V 10W 3K,4K,5K Selectable LED
Triac Dimmable
Output: 800-900 lumen, CRI90
Beam angle: 24°
Size: 96mm Ø*74H
Cutout: 85-90mmØ
Classification: IC-F



MURIWAI

DL138 IP40 Aluminium
Colour: White



240V 3.3W 3K LED
Tilt 20°
Non dimmable
Beam angle: 32°
Output: 180 lumen, CRI80
Size: 50Ø*32H
Cutout: 45Ø
Classification: IC-F

WHANGAMATA

DL333 IP54 Aluminium
Colour: White



240V 6W COB LED
CCT selectable 3K, 4K, 5.7K
Triac dimmable
Tilt: 30°
Output: 450-600 lumen, CRI80
Beam angle: 60°
Size: 95Ø*73mm high
Cutout: 78-85mm Ø
Classification: IC-F, Fire rated for 90 minutes to BS476 standard



WHITIANGA

DL593 IP65 Aluminium
Colour: White



240V Non-integrated fitting
GU10 lamp (sold separately)
Size: 100Ø*95H
Cutout: 70mm Ø
Classification: IC-F

WAITOMO

DL43 IP20 Aluminium
Colour: White



Fixed beam anti glare
Suited to larger areas or high stud
240V 13W 3K LED
Triac dimmable
Beam angle: 42°
Output: 1150 lumen, CRI80
Size: 92Ø*87H
Cutout: 83Ø
Classification: IC-F

TASMAN

CL76 IP54 Front (IP20 Back) Aluminium
Colour: White, Black



240V 10W 3K LED
Tilt 25°
Triac dimmable
Output: 770 lumen 60 degree beam, CRI80
Size: 95Ø*55H.
Cutout: 85Ø (will fit 82-88mm)
Classification: IC-F

MCKENZIE

CL78 IP54 Aluminium
Colour: White, Black



240V 8W 3K LED
Tilt 25°
Triac dimmable
Output: 700 lumen 36° degree beam
Size: 80Ø*50H
Cutout: 70Ø (will fit 68-74mm)
Classification: IC-F

DUNSTAN

DL103A IP65 Waterproof on front face
Colour: White, Black




240V 8W CCT Selectable 3K, 4K, 5K LED
Indoor/Outdoor
Triac dimmable, Beam angle 60°
Output: 700 lumen
Size: 80Ø*40H
Cutout: 70Ø
Classification: IC-F



BENMORE

DL104A IP65 Waterproof on front face
Colour: White, Black



240V 8W CCT Selectable 3K,4K,5K LED
Indoor/Outdoor
Triac dimmable
Output: 700 lumen, CRI90
Beam angle: 60°
Size: 80W*80W*40H
Cutout: 68-75Ø
Classification: IC-F



MAKARORA

CL104B IP65 Aluminium
Colour: White, Black



240V 10W CCT Selectable 3K,4K,5K LED
Tilt 30°
Triac dimmable
Output: 800 lumen 36° beam
Size: 90*90W*39H
Cutout: 75-80Ø
Classification: IC-F



WESTPORT
DL222

IP20 Polycarbonate
Colour: White

240V 16W LED
CCT Selectable 3K,4K,5.7K
Beam angle: 120°
Output: 1500-1800 lumen
Triac Dimmable
Size: 235Ø*20D
Cutout: Variable from 65 - 205Ø



CABINET LIGHTS

WARKWORTH
DG-F03D

IP44 Aluminium & PC diffuser
Colour: White


Swivel 270° & tilt 15°
Ultra thin for 10mm thick joinery
Constant current - series wiring
240V 2.5W 350ma 3K LED
Order driver separately
Dimmable (with appropriate driver)
Output: 300 lumen, CRI80
Size: 70Ø*10d
Cutout: 60Ø
Classification: CA80



WAIWERA
DG-F03

IP44 Aluminium & PC diffuser
Colour: Silver, White

Constant current - series wiring
Ultra thin 10mm for finer joinery
2.5W 350ma 3K LED
Output: 300 lumen
Order driver separately
Dimmable (with appropriate driver)
Size: 60Ø*10D
Cutout: 50Ø
Classification: CA80

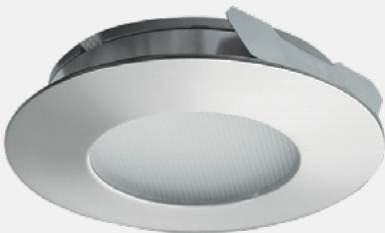

PENDANTS

SEE WEBSITE FOR FULL RANGE OF DECORATIVE PENDANTS.

RUAKAKA
PT227

IP20 Aluminium
Colour: White, Black
Black, White, Silver or Gold inner ring



240V 12W LED
Beam angle: 34°
Output: 965 lumen, CRI80
Size: 90Ø*150mmH 1.5M drop

MANGONUI
PT115

IP20 Aluminium
Colour: White, Black



240V 9W LED
Beam angle: 36°
Output: 1120 lumen, CRI80
Size: 60Ø*278MM high, 1.5m drop

GLENTANNER
PT20



Please see website for more details

PX36001 PENDANT



Please see website for more details

PX36008 PENDANT



Please see website for more details

PX36025 PENDANT



Please see website for more details

P013AM PENDANT



Please see website for more details

DT0101 PENDANT



Please see website for more details

P5025 PENDANT



Please see website for more details

SURFACE LIGHTS

PUHOI
NS207-15W

IP20 Cast aluminium
Colour: White, Black



90° Tilt and 330° Swivel
240V 15W 3K or 4K or CCT LED
Triac dimmable
Output: 1230-1420 lumen
Beam angle: 36°
Head size: 85Ø*186L

RUAWAI
NS226

IP20 Aluminium
Colour: White, Black



240V 10W 3K COB LED
Triac dimmable
Reflector options: Black, White, Silver, Gold
Beam angle: 36°
Output: 1030 lumen, CRI80
Size: 80Ø*130H

MATARANGI
NS227

IP54 Aluminium
Colour: White, Black



240V 12W 3K COB LED
Triac dimmable
Reflector options: Black, White, Silver, Gold
Output: 1011 lumen, CRI 90
Beam angle: 50°
Size: 90Ø*150H

RANFURLY
NS230

IP20 Aluminium
Colour: White, Black



Optional Gold reflector
240V 12W LED 3K or 4K
Triac dimmable
Tilt and swivel
Beam angle: 36°
Output: 1230 lumen
CRI: 90
Size: 60mmØ*150mm long

WELLSFORD
NS215B

IP20 Aluminium
Colour: White



240V 9.5W 3K or 4K LED
Triac dimmable
Output: 945 lumen, CRI80
Beam: 34°. Tilt 90° swivel 350°
Size: 75Ø*91H

TE HANA
NS215

IP20 Aluminium
Colour: White, Black



240V 9.5W 3K or 4K LED
Triac dimmable
Output: 945 lumen, CRI80
Beam: 48°. Tilt 90° swivel 350°
Size: 75Ø*91H

ALBANY
NS216

IP20 Aluminium
Colour: White, Black



240V 14W 3K or 4K LED
Triac dimmable
Output: 1474 lumen, CRI80
Beam: 52° Tilt 90° swivel 350°
Size: 100Ø*103H

Buttons & Battens

TIKIPUNGA
C114-12W

IP54 Indoor/outdoor polycarb
Colour: White



Double insulated
240V 12W CCT Selectable LED
Triac dimmable
Beam angle: 120°
Output: 1710 - 1910 lumen
Size: 250Ø*40D

TITOKI
C115D-18W & C116D-25W

IP54 Indoor/outdoor polycarb
Colour: White



C115D-18W
Double insulated
240V 18W CCT Selectable LED
Triac dimmable
Beam angle: 120°
Output: 1710-1910 lumen, CRI80
Size: 300Ø*40D

C116D-25W
Double insulated
240V 25W CCT Selectable LED
Triac dimmable
Beam angle: 120°
Output: 2300-2575 lumen, CRI80
Size: 350Ø*40D

OMANA
CL87-18W & CL87-25W

IP54 Indoor/outdoor polycarb
Colour: Black




CL87-18W
Double insulated
240V 18W 3K or 4K LED
Triac dimmable
Output: 1800 lumen, 120°
Size: 275Ø*65D

CL87-25W
Double insulated
240V 25W 3K or 4K or CCT LED
Non dimmable
Output: 2600 lumen, 120°
Size: 350Ø*65D

HIKURANGI
C117-18W


IP54 Indoor/outdoor polycarb
Colour: White

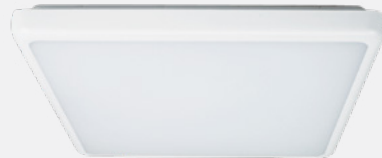

Double insulated
240V 18W CCT Selectable LED
Triac dimmable
Beam angle: 120°
Output: 1800-1995 lumen, CRI80
Size: 300*300W*40D

MATAURI
UL3400

IP54 Aluminium & PC diffuser
Colour: Black

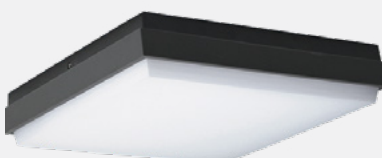

240V 20W 3K LED
Non dimmable
Size: 240*240*50D

PUNAKAIKI
DB10



IP20 Steel
Non dimmable

DB10-600
Selectable: 10W/15W/20W
Output: 1400-2400lm
CCT Selectable: 3K, 4K or 6.5K
Size: 570*65*70mm




DB10-1200
Selectable: 20W/30W/40W
Output: 2800-4800lm
CCT Selectable: 3K, 4K or 6.5K
Size: 1170*65*70mm



DB10-1500
Selectable: 30W/40W/50W
Output: 4200-6000
CCT Selectable: 3K, 4K or 6.5K
Size: 1470*65*70mm

WAIKARI
DB08-600, DB08-1200

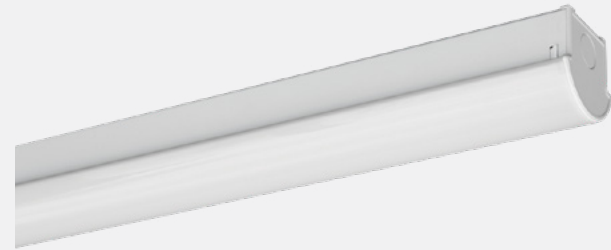

DB08-600
240V 20W 4K LED
Beam angle: 120°
Output: 2400 lumen
Size: 625L*59W*59H

DB08-1200
240V 40W 4K LED
Beam angle: 120°
Output: 3860 lumen
Size: 1225L*59W*59H

TRYPHENA
AL17



IP20 Aluminium & plastic
Colour: White ends, aluminium finish body

Loose flying lead for easy positioning
240V 42W 3K LED
Non dimmable
Output: 3800 lumens
Size: 1210L*75W*25D

PIPIWAI
DB21



IP20 Steel & plastic
Colour: White, Black

Stylish residential alternative
240V 40W 3K LED
Output: 4200 lumens
Beam: 120°
Size: 1200L*90W

Residential Spot Lights

HT TRACK SYSTEM - INTEGRATED

RANGIRIRI

SR800D-13W

IP20 Aluminium
Colour: White, Black



240V 12W 3K or 4K LED
Triac dimmable
Output: 1500 lumen, CRI90
Size: 75Ø*120L
Supplied with 50° reflector
Other options: 15°, 24°, 36°

LITTLE KAITERITERI

SA100

IP20 Aluminium
Colour: White, Black



240V 5.5W CCT Selectable 3K or 4K
Triac dimmable
Output: 580 lumen
Size: 50Ø*105L
Supplied with 36° reflector
Other options: 15°, 24°, 60°



KAITERITERI

SA150

IP20 Aluminium
Colour: White, Black



240V 9.9w CCT Selectable 3K or 4K
Triac dimmable
Output: 1100 lumen
Size: 62Ø*137L
Supplied with 36° reflector
Other options: 15°, 24°, 60°



FITZROY

SA294CR-13W

IP20 Aluminium
Colour: White, Black



240V 13W 3K or 4K
Tilt and Swivel, Cut to any length
Rod 100 - 500mm
Size: 60Ø*145L
Output: 1200 lumen

TUAKAU

SA294CD-13W

IP20 Aluminium
Colour: White, Black, Silver



240V 13W 3K or 4K or CCT LED
Triac dimmable
Output: 1200 lumen
Size: 60Ø*145L
Supplied with 50° reflector
Other options: 15°, 24°, 36°



ELTHAM

SA300

IP20 Aluminium
Colour: White, Black



12.5W LED
Triac dimmable
Supplied with 36° reflector
Other options: 15°, 24° or 60°
Size: 95Ø*35D
Output: 1500 lumen

Base options available on request

HT TRACK SYSTEM - GU10

GU10 LED LAMPS
Recommended a good quality branded lamp is used.
Budget lamps are likely to give very poor quality light & fail easily, compromising the installation.

RESIDENTIAL SPOTS

BASE OPTIONS

Spots are supplied with track adaptor
Alternatively order base or recessed plate



Affordable LED spot option
No driver required
Triac dimmable
Attractive flush adaptor design
Neat & tidy - smallish spot
Output ideal for residential
Easy to change lamps

CLARKS BEACH

HSP37 Aluminium
Colour: Black, White



MONOWAI

HSP295 IP20 Aluminium
Colour: White, Black, Silver



RUATORIA

HSP294100 IP20 Aluminium
Colour: White, Black



HTC TRACK

Recessed track for HT spot system



Colour: White, Black

240V 16 Amp 1 circuit (3 wire) phase, neutral & earth
End feed & end cap priced separately
Length options: 1m, 2m, 3m or cut to any length
Size: Outer trim 55W*18H, Cutout 40W

TRACK COVER STRIP
Colours: White, Black
Cut to length strips to conceal the gap between fitting.

HT TRACK

Surface track for HT spot system




Colour: White, Black, Silver

240V 16 Amp 1 circuit (3 wire) phase, neutral & earth
Includes end feed & end cap
Length options: 1m, 1.5m, 2m, 3m or cut to any length
Size: 35W*18H

TRACK COVER STRIP
Colours: White, Black
Cut to length strips to conceal the gap between fitting.

Track Components

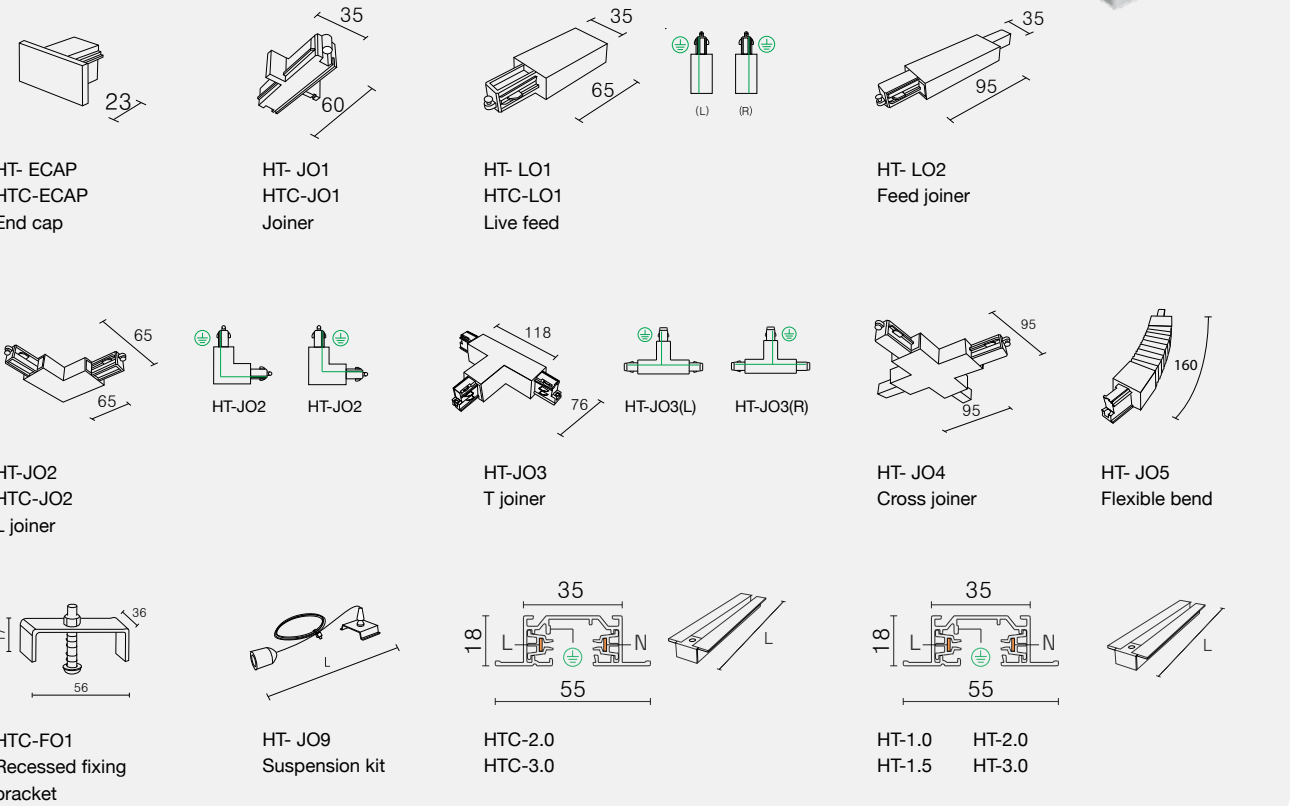

MOKOHINAU
TL66 & TL66-UD-1500



IP40 Aluminium, opal diffuser, aluminium end caps
Color: White, Black

TL66: Light shines down only
TL66-UD-1500: Light shines up and down
240V 42W LED. 3K or CCT Selectable 3K/4K/5.7K. Triac dimmable
Output: 4200 lumen, 120° beam
Size: 1504L*56W*75H
Linkable with straight joining & right angle bend
Suspended or surface mount with components included
Suspensions: 1.5m adjustable (or 3m to order)



TL66-J
Straight joiner



TL66-LJ
Right angle joiner



Magnetic Track

MT-2M
IP20 Aluminium surface channel
End caps included
Linkable with joiners
24V DC 8A maximum
Size: 2000L*39W*76H - or cut to length

MT-DB
Dimmable 150W driver

MT-J
Straight joiner kit

MT-LJ
Right angle bend

MT-CS
Plastic cover infill strip

MT-EC
End cap

- Aluminium magnetised channel 2m long & linkable
- The spots & blades simply slot in
- The system is powered by a 24V dimmable driver (MT-DB, sold separately) which is supplied in a track box (or can be remotely located)
- Additional fittings can be easily introduced up to the 150W limit of the MT-DB driver

POWER SUPPLIES
Available on request or see website
More photos & info online at www.prolux.co.nz

MT60



IP20 Aluminium

Protruding diffused blade
24V 13W 3K LED
Dimmable
Output: 620 lumen CRI80
Beam angle: Diffused
Size: 320L*34W*110H

MT66 & MT62



IP20 Aluminium

MT66
Flush optical lens blade
24V 16W 3K LED
Dimmable
Output: 1450 lumen CRI80
Beam angle: 34°
Size: 320L*34W*56H

MT62
Flush diffused blade
24V 13W 3K LED
Dimmable
Output: 620 lumen CRI80
Beam angle: Diffused
Size: 320L*34W*56H

MT72



IP20 Aluminium

MT72
Spotlight
24V 8W 3K LED
Dimmable
Output: 280 lumen CRI-80
Beam angle: 30°
Size: 320L*34W*110H

SURFACE CHANNEL

End caps and fixing clips included. **Order LED tape separately**



AP116C
2m Channel & diffuser
Profile size: 18W*8.5H*2000L
Recommended tape:
FS-COB or FS-12V-15W or
FS-24V-15W



AP112C
2m Channel & diffuser
Profile size: 23.5W*10H*2000L
Recommended tape:
FS-COB or FS-12V-15W or
FS-24V-15W



AP110C
2m Channel & diffuser
Profile size: 16W*16H*2000L
Recommended tape:
FS-COB or FS-12V-15W or
FS-24V-15W



AP176C
2m Channel & diffuser
Profile size: 26W*23H*2000L
Recommended tape:
FS-COB or FS-12V-15W or
FS-24V-15W

RECESSED CHANNEL

End caps included. **Order LED tape separately**



AP104C
2m Channel only including
end caps
Profile size: 25W*7H*2000L
Recess width: 17.4W
Recommended tape:
FS-COB or FS-12V-15W or
FS-24V-15W



AP133C
2m Channel only including end caps
Profile size: 30.3W*10H*2000L
Recess width: 23.5W
Recommended tape:
FS-COB or FS-12V-15W or
FS-24V-15W



AP101C
2m Channel only including end caps.
Recessed deeper profile for diffused light
Profile size: 25W*14.5H*2000L
Recess width: 17.4W
Recommended tape: FS-COB or
FS-12V-15W or FS-24V-15W.

SUITABILITY

IP20 Indoors commonly used in cabinet
joinery, cupboards.
Supplied standard with 300mm tails

COMPATIBILITY

Ordering as a kit to ensure compatibility

DRIVERS & LED tape

See pages Power Supplies & LED Tape
Sold Separately

FEED CABLE

Supplied standard with 300mm tails


FACTORY CUTS

Custom length cuts and tails
available on request


FIXING CLIPS




AP116
Fixing clips included



AP110
Fixing clips included



AP112
Fixing clips included




AP176
Fixing clips included

ALP017



Profile size: 2000L*50W*35D.
Cutout: 35W
Output: 25W 2100 lumen per meter with
single strip
Recommended:
FS-12V-25W or FS-24V-25W
double array tape



Recessed aluminium channel with opal matt diffuser
Colour: White, Black, Anodized silver



LED Tape



ALP017-FC
Fixing clips



ALP017-EC
End caps




ALP017-J
Joiner bars x2

ALP018



Profile size: 2000L*35W*35D
Cutout: 35W
Output: 25W 2100 lumen per meter
Recommended:
FS-12V-25W or FS-24V-25W double
array tape



Aluminium channel with opal matt diffuser
Colour: White, Black, Anodized silver



LED Tape



ALP018-FC
Fixing clips




ALP018-EC
End caps




ALP018-J
Joiner bars x2

ALP019

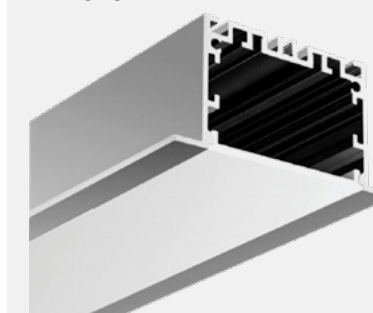

Profile size: 2500L*65W*35D
Cutout: 50W
Output: 25W 2100 lumen per meter
with single strip
Recommended:
FS-12V-25W or FS-24V-25W double
array tape



Recessed aluminium channel with opal matt diffuser
Colour: White, Black, Anodized silver



LED Tape



ALP019-FC
Fixing clips




ALP019-EC
End caps




ALP019-J
Joiner bars x2

ALP020



Profile size: 2500L*50W*35D
Cutout: 50W
Output: 25W 2100 lumen per meter with single strip
Recommended:
FS-12V-25W or FS-24V-25W double array tape



Aluminium channel with opal matt diffuser
Colour: White, Black, Anodized silver



LED Tape



ALP020-EC
End caps




ALP020-FC
Fixing clips



ALP020-J
Joiner bars x2


ALP707



Cornice Channel 2.0m long including end caps.
Recommended tape:
FSNAR-24V-10W COB strip in 3K or 4K




Colour: White



LED Tape



◀ **FS-12V-4.8W**
Colour temp: 3K, 4K
◀ **FS-12V-9W**
Colour temp: 3K, 4K



◀ **FS-12V-15W**
Colour temp: 3K, 4K, Blue



◀ **FS-24V-15W**
Colour temp: 3K, 4K



◀ **FS-12V-25W**
Colour temp: 3K, 4K
◀ **FS-24V-25W**
Colour temp: 3K, 4K



◀ **FS-COB-24V-10W**
Colour temp: 3K, 4K



◀ **FS-COB-24V-15W**
Colour temp: 3K, 4K
IP65

CODE	INPUT	LED'S PER M	LED TYPE	ROLL LENGTH	CUT WIDTH	MAX RUN	COLOUR TEMP	WATTS PER M	LUMEN PER M		
FS-12V-4.8W	12V	60	3528	5m	5cm	5m	3K or 4K	4.8W	370		
FS-12V-9.6W	12V	60	3528	5m	2.5cm	5m	3K or 4K	9.6W	650		
FS-12V-15W	12V	60	5050	5m	5cm	5m	3K or 4K	15W	1200		
FS-24V-15W	24V	60	5050	10m	10cm	10m	3K or 4K	15W	1200		
FS-12V-25W	12V	120	5050	10m	5cm	5m	3K or 4K	25W	2000		
FS-24V-25W	24V	120	5050	10m	5cm	10m	3K or 4K	25W	2000		
FS-COB-24V-10W	24V	NA	COB	10m	5cm	10m	3K or 4K	10W	1100		
FS-COB-24V-15W	24V	NA	COB	5m	2.5cm	10m	3K or 4K	15W	1500	IP65	COB Constant Voltage LED
FS-24V-17W-RGBW	24V	120	5050	10m	5cm	10m	RGBW	17W	1400		3M Brand adhesive backing
FS-SAUNA	24V	80	5050	10m	5cm	10m	3K or 4K	9.6W	750	IP65	40,000 hours life
FS-Controller DC12-24V 240W-480W											

Neon Flex available for indent order

Constant voltage drivers
- Non dimmable

Q4-12V-6W
Input 240V, Output 12V 6W
Q4-12V-12W
Input 240V, Output 12V 12W
Q4-12V-20W
Input 240V, Output 12V 20W
Q8H-12V-40W
Input 240V, Output 12V 40W
Q8H-12V-50W
Input 240V, Output 12V 50W
Q2-12V-75W
Input 240V, Output 12V 75W
Q3-24V-36W
Input 240V, Output 24V 36W
Q3-24V-50W
Input 240V, Output 24V 50W
Q3-24V-75W
Input 240V, Output 24V 75W

Constant Voltage drivers
- TRIAC dimmable

DIM-24-50W
DIM-12-50W
Size: 184*61*52
V2-100-12T
Input 240V, Output 100W
V2-100-24T
Input 240V, Output 100W
V2-200-24T
Input 240V, Output 200W

See Power Supply page for more options

SUITABILITY
Indoor IP20 tape is not suitable in areas exposed to moisture

VOLTAGE CHOICE
The 24V can run twice the distance & costs the same as 12V



INSTALLATION
Constant voltage must be wired in parallel

ORDERING
Specify feed cable length - standard is 300mm



Indoor Wall Lights

INDOOR WALL LIGHTS

NASEBY

W50 IP20 Aluminium with base switch
Colour: White, Black



Head pivots 180°
240V 4W LED
Non dimmable
CCT: Switchable 3K/4K/6K
Output: 470-550 lumen
Size: 159*69*132D



OMARAMA

W60 IP20 Aluminium
Colour: White, Black



240V 3.4W 3K
Push button dimming
90° tilt 350° swivel
Size: 310*125mm long
Base: 800*38mm deep

PORTLAND


W1800D IP20 Aluminium
Colour: White, Black



Light 50/50 up down
240V 6.2W 3K LED
Output: White 410 lumen, Black 166 lumen
Triac dimmable
Size: 175W*80H*90D

OXFORD

HL531 IP65 Aluminium
Colour: White



Up & down light
240V 6W 3K LED
Non dimmable
Size: 220W*90H*77D

KAREKARE

W1705 IP20 Aluminium
Colour: White, Black



Shines 85% up, 15% down
240V 9.2W 3K LED
Triac dimmable
Output: 942 lumen
Size: 205W*26H*95D

TOTARANUI

W80 IP65 Aluminium and glass.
Colour: White, Black



240V 9W LED
CCT: selectable 2700K, 3000K or 4000K
Triac dimmable
Size: 130 dia*71mm

TEKAPO

W70 IP20 Solid brass
Colour: Natural brass



240V 3W 3K LED
90° tilt 350° swivel
Non dimmable
Output: 310 lumen
Size: 380*110*85mm
out from wall
Base: 110*50*25mm deep

MANGAWHAI

MB704



IP20 Aluminium
Colours: White, Black

240V 12W 3K or 4K
180 degree tilt
720 lumen
Size: 600*45mm
Base: 125*45mm
Fitting reaches 270mm
maximum out from wall

WAIMATE

W633-12W



IP20 Aluminium
Colours: White, Black

240V 12W
CCT Switchable 3K/4K
Non dimmable
Output: 610 lumen
Size: 600L*140D



CORONET

MB537



IP20 Steel
Colour: Chrome


MB537-8W
240V 8W 3K or 4K or CCT
Non dimmable
Base: 125W*45H
Size: 452L*125D

MB537-12W
240V 12W CCT LED
Non dimmable
Base: 125W*45H
Size: 570L*125D



THORNDON

MB542-8W

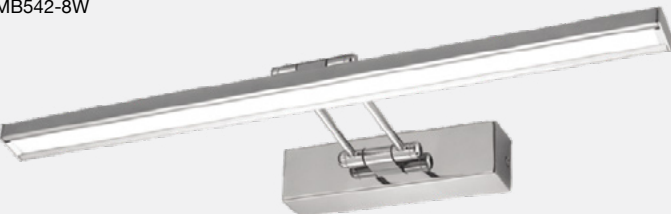

IP20 Steel
Color: Chrome

Swing arm & tilt head
Suitable as picture light
240V 8W 3K or 4K
370 lumen
Non dimmable
Size: 450L*185D
Base: 125W*45H

HERMITAGE

MB113-12W



IP20 Plastic double insulated
Color: Satin chrome

240V 12W 3K or 4K LED
Non dimmable
Size: 700L*60D

NGAROTO

W1933-20, W1933-16

IP20 Aluminium



W1933-20

Colour: White, Black, Silver
240V 20W 3K or 4K LED
Non dimmable
Size: 500L*125D

W1933-16

Colour: White, Black
240V 16W 3K or 4K LED
Non dimmable
Size: 400L*125D

MILTON

W641

IP20 Aluminium
Colour: White, Black



180° light spread
240V 18W LED 3K or 4K
Non dimmable
Size: 600L*95D

ROXBURGH

MB709

IP20 Aluminium
Colour: Black



Tilt 180°
240V 30W LED 3K
Non dimmable
Size: 887mm (L)
Base: 190Ø *75 *35mm (D)

STRATFORD

MB550-12W

IP20 Steel
Colour: Chrome



240V 12W 3K or 4K LED
Non dimmable
Size: 590L*130D

DANNEVIRKE

MB666

IP20, Polycarbonate
Colour: White, Black, Chrome



Double insulated
180 degree tilt head
240V 12W 3K or 4K or 6K
Non Dimmable
Output: 960 lumen
CRI: 80
Size: 634mm long
Base: 142*60*35mm D



Stair Lights

All stair lights complete with driver

ROUTEburn


LDL68

Choice of 6 magnetic interchangeable
face plates in glass or aluminium

IP20 Aluminium or Glass
Colour: White, Black



IC-F
500mA 1.5W LED 3K or 4K
Non dimmable
Driver included
CRI: 90
Cutout: 60mm Ø *65mm deep



LDL68SQ-WH



LDL68GSQ-WH



LDL68R-WH



LDL68GR-WH



LDL68R-BK



LDL68SQ-BK

OMAHA

LDL-W01

IP20 CNC aluminium
Colour: White, Black



350mA 1W 3K LED
Driver included
Non dimmable
Size: 50Ø.
Cutout: 43Ø

MANAWATU

LDL1927

IP20 CNC Aluminium
Colour: White, Black, Aluminium



700mA 2.5W 3K or 4K LED
Driver included
Non dimmable
Size: 76W*76W*45D
Cutout: 65*65W

EGMONT

LDL-E01

IP20 Die cast aluminium
Colour: White, Silver



350mA 1W CCT Selectable 3K/4K LED
Driver included
Non dimmable
Size: 90*90W*32D
Cutout: 77*77W



TONGARIRO

LDL-C01

IP20 Die cast aluminium
Colour: White, Black, Silver



350mA 1W constant current 3K or CCT
Driver included
Non dimmable
Size: 90*90W*32D
Cutout: 77*77W





Outdoor

Outdoor

OUTDOOR DOWNLIGHTS

DUNSTAN
DL103A

IP65 Waterproof on front face
Colour: White, Black



240V 8W CCT Selectable 3K, 4K, 5K LED
Indoor/Outdoor
Triac dimmable, Beam angle 60°
Output: 700 lumen
Size: 80Ø*40H
Cutout: 70Ø
Classification: IC-F



BENMORE
DL104A

IP65 Waterproof on front face
Colour: White, Black



240V 8W CCT Selectable 3K,4K,5K LED
Indoor/Outdoor
Triac dimmable
Output: 700 lumen, CRI90
Beam angle: 60°
Size: 80W*80W*40H
Cutout: 68-75Ø
Classification: IC-F



WHANGAMATA
DL333

IP54 Aluminium
Colour: White



240V 6W COB LED
CCT selectable 3K, 4K, 5.7K
Triac dimmable
Tilt: 30°
Output: 450-600 lumen, CRI80
Beam angle: 60°
Size: 95Ø*73mm high
Cutout: 78-85mm Ø
Classification: IC-F, Fire rated for 90 minutes to BS476 standard




HAHEI
SL3301-LED8W-KIT
SL3301-NON-IC




IP44 Recessed
Colour: Stainless 316, Raw copper

SL3301-NON-IC -Fitting only
SL3301-LED8W-KIT -Includes lamp & driver
Tilt: 20°
Size: 100Ø
Cutout: 82Ø
Classification: CA-90

THAMES
SL3302-LED8W-KIT
SL3302-NON-IC

IP44 Recessed
Colour: Raw copper



SL3302-NON-IC - Fitting only
SL3302-LED8W-KIT - Includes lamp & driver
Tilt: 20°
Size: 100*100W
Cutout: 82Ø
Classification: CA-90

PUKEKOHE
DL37

IP54 Aluminium & Glass
Colour: White, Black



240V 15W 3K LED
Non dimmable
Output: 1300 lumen, 60 degree
Size: 90Ø*100H



KARAKA
DL38

IP54 Aluminium & Glass
Colour: White, Black



240V 20W CCT Switchable 3K/4K/5K
Triac dimmable
Output: 2300 lumen, 60°
Size: 120Ø*110H



MOTU
DL169

IP54 Aluminium & steel
Colour: White, Black




240V 25W LED
CCT Switchable 3K / 4K / 5K
Triac dimmable
Output: 2400 lumens, 60°
Size: 120Ø*144H



MATAURI
UL3400

IP54 Aluminium & PC diffuse
Colour: Black



240V 25W 3K LED
Non dimmable
Size: 240*240*50D



OMANA
CL87-18W & CL87-25W

IP54 Indoor/outdoor polycarb
Colour: Black



CL87-18W
Double insulated
240V 18W 4K or CCT Selectable 3K,4K,5.7K
Triac dimmable
Output: 1750-2100 lumen, 120°
Size: 275Ø*65D

CL87-25W
Double insulated
240V 25W 3K or 4K LED Non dimmable
or CCT Selectable 3K,4K,5.7K Dimmable
Output: 2400-2800 lumen, 120°
Size: 350Ø*65D



TIKIPUNGA
C114-12W

IP54 Indoor/outdoor polycarb
Colour: White



Double insulated
240V 12W CCT Selectable LED
Triac dimmable
Beam angle: 120°
Output: 1710 - 1910 lumen
Size: 250Ø*40D



TITOKI
C115D-18W & C116D-25W

IP54 Indoor/outdoor polycarb
Colour: White



C115D-18W
Double insulated
240V 18W CCT Selectable LED
Triac dimmable
Beam angle: 120°
Output: 1710-1910 lumen, CRI80
Size: 300Ø*40D

C116D-25W
Double insulated
240V 25W CCT Selectable LED
Triac dimmable
Beam angle: 120°
Output: 2300-2575 lumen, CRI80
Size: 350Ø*40D



OUTDOOR WALL LIGHTS

INSTALLATION

All outdoor wall fixtures need to be sealed from behind with silicone to prevent general deterioration and electronic failure.

ALUMINIUM SUITABILITY

Most die-cast aluminium products are not suitable for harsh coastal conditions - consider alternatives such as plastic, brass and copper.

COPPER & BRASS CHARACTERISTICS

As with other raw copper and brass outdoor products, these will weather and darken over time.

STAINLESS SUITABILITY

316 grade is suitable for all outdoor conditions except extreme seaside conditions where marine grade products may be required.

SUMNER
UL7710

IP54 Aluminium
Colour: White, Black, Graphite



Up down light
240V 6W 3K LED
Output: 300 lumens
Size: 67W*165H*89D



ORETI
UL7715

IP54 Aluminium
Colour: White, Black



Up down light
240V 6W 3K LED
Output: 370 lumens
Size: 110W*110H*95D



HAURAKI
UL7720

IP54 Aluminium
Colour: White, Black, Graphite



Up down light
240V 10W 3K LED
Output: 500 lumens
Size: 140W*140H*110D



DENNISTON
UL4101

IP54 Aluminium
Colour: White, Black



Up down light
240V 8W (2 x 4W) 3K LED
Output: 630 lumens
Size: 85W*65H*70D



MURCHISON
UL4102

IP54 Aluminium
Colour: White, Black



Up down light
240V 12W (2 x 6W) 3K LED
Output: 1120 lumens
Size: 170W*65H*70D



NEWSTEAD
HL2621

IP54 Aluminium
Colour: White, Black



240V 14W (2 x 7W) 3K LED
Size: 62W*143H*82D



MATAURA
HL7054

IP54
Colour: Raw copper



Double directional spot
240V GU10 LED
Size: Heads 60Ø*90L
Base: 110Ø

TUAPEKA
HL7070

IP54 Aluminium & glass
Colour: White, Black, Silver



One way light - up or down
240V GU10 LED
Size: 90L*65W
Base: 64*64

BALCLUTHA
HL7071

IP54 Aluminium & glass
Colour: White, Black



Fixed two way light
240V GU10 LED
Size: 160H*65W*65W
Base: 64*64

MAYFIELD
HL104

IP65 Aluminium & PC diffuser
Colour: Black



Built in driver
Non dimmable
240V 15W
CCT Switch Selectable 3K, 4K, 6K
Output: 1390-1650 Lumen
CRI: 80
Fitting Size:
250mm x 150mm x 63mm deep

RUAPUNA
HL5541L & HL5541

IP54 Aluminium & PC diffuser
Colour: White, Black



HL5541L
240V 12W 3K LED
HL5541
240V 2*E27
Size: 180W*290H*88D

OXFORD
HL531

IP65 Alumimium
Colour: White



Lights shines up and down
240V 6W 3K LED
Non dimmable
Size: 220W*90H*77D

CLYDEVALE
HL7355

IP54 Aluminium & glass
Colour: White, Black, Silver



Fixed two way light
240V GU10 LED
Size: 60Ø*165H
Base: 68Ø

PUKETI
HL7142

IP54 Aluminium & glass
Colour: White, Black



One way light - up or down
240V GU10 LED
Size: 60Ø*90H
Base: 68Ø

MANAPOURI
HL7354-2B

IP54 Aluminium
Colour: White, Black



240V GU10 LED
Size: 300L*50W*25D
Base: 300L*50W

COACH
EL270UP

IP44 Aluminium
(Coach lantern)
Colour: Black



240V E27
Can be assembled with the head above or below the base
Size: 350H

CHEVIOT
HL3062

IP54 Aluminium
Colour: White, Black



Built in driver
Non dimmable
240V 7W 3K LED
Output: 200 lumen, indirect reflected
Size: 250H&125W*120D

AMBERLEY
HL4511

IP54 Aluminium
Colour: White, Black



Built in driver
Non dimmable
240V 15W 3K LED
Output: 750 lumen
Size: 250H&150W*115D

CLYDE
HL7354-2P

IP54 Aluminium & glass
Colour: White, Black



Swivel & tilt
240V GU10 LED
Base: 100Ø


WINTON
HL7354

IP54 Aluminium
Colour: White, Black



Swivel & tilt
240V GU10 LED
Size: 60Ø*90L*160D
Base: 68Ø

UV STABILIZED PLASTIC WEDGE
for weatherboard walls



WDG-70mm
Colours: White, Black
Fits: HL7142, 7354, 7355
WDG-78mm
Colours: Black, Brown, Grey
Fits: HL7031, 7032, 7033, HL7051, 7052, 7053

RANGIORA
HL532

IP54 Alumimium
Colour: White, Black



Lights shines up and down
240V 12W 3K LED
Non dimmable
Size: 300W*120H*97D.
Base: 270W*90H

HAREWOOD
FL01

IP65 Aluminium and Plastic
Colour: White, Black



Settings for sensitivity time and lux
Integrated lamp and driver
Removable and/or replaceable sensor
240V 24W LED (2 x 12W)
CCT Switch 3K,4K,5K
Output: 1950-2400 lumens
Beam angle: 100°
CRI: 80
Base: 120mm diameter
Heads: 76mm diameter x 128mm

OUTDOOR LOW LEVEL

TE KUITI

UL9500

IP64

Colour: Black, Graphite, White



Slim surface step light
Alternative to recessed
240V 3W
CCT Selectable
2.2K/2.7K/3.0K/4.0K LED
Size: 100W*100H*30D



TAIPA

UL9400

IP65

Colour: Black, White



Slim surface step light
Alternative to recessed
240V 3W
CCT Selectable
2.2K/2.7K/3.0K/4.0K LED
Size: 100Ø*30D



AKAROA

UL9600

IP64

Colour: Black, Graphite,White




Slim surface step light
Alternative to recessed
240V 8W 3K LED
Size: 198W*77H*32D

WAIAKE

IL3104

IP64

Colour: Stainless 316, Raw copper



Recessed eyelid step-light
Constant voltage driver on request
12V GU5.3 removable MR16 lamp
Order lamp: GEMR-LIVE
Face Size: 90Ø
Body Size: 115D*60Ø
Plastic sleeve: 70Ø*130L
(for casting into walls)

MATATA

IL1105HBR-EYE

IP65

Colour: Raw Brass



Recessed eyelid step-light
Constant current driver on request
Wire in series
Includes 2m lead
350ma 1W 3K LED
Size: 55Ø*70D
Cutout: 40Ø
(for clipping into timber or dry wall)

MATATA

IL1105EYE

IP65 Aluminium

Colour: Stainless 316, Raw copper, Black



Recessed eyelid step-light
Constant current driver on request
Wire in series
Includes 2m lead
350ma 1W 3K LED
Size: 55Ø*70D
Cutout: 40Ø
(for clipping into timber or dry wall)

KUMARA

HL7472

IP55

Colour: Raw copper, 316 Stainless



Surface mount
12V 1.5W LED
Order lamp separately: DISC-1.5W
Order driver separately
Size: 100Ø*50D

BRETT

HL2471

IP54 Aluminium & glass

Colour: White, Black



Small wall light or step light
240V 2W 3K LED
Size: 80H*75W*63D

OHOKA

UL9700

IP65 Cast Aluminium and glass

Colour: Black



Recessed light
240V 6W LED 3K
Output: 680 lumen
Size: 225W*75H*50D
Cutout for recessed box: 215W*67H

OUTDOOR DECK LIGHTS

COMPATIBILITY

Use only driver supplied (order separately). Third party drivers may cause flashing and diode failure.

WIRING

In series only - one loop per driver only. Wiring in parallel results in instant failure of all diodes. Wiring with more than one loop results in one loop not working. DO NOT attach fittings to live driver.

DRIVERS

See Power Supplies Commonly used: MINI350-4W, WP-350-12W, MINI350-12W

TE PUKE

IL1105H-ST

IP65

Colour: Stainless 316



Deck recessed LED
Constant current driver required
Dimmable
350ma 1W 3K LED
Includes 2m lead
Size: 55Ø*70D
Cutout: 40Ø

MAKETU

IL1105H-CO

IP65

Colour: Raw copper



Deck recessed LED
Constant current driver required
Dimmable
350ma 1W 3K LED
Includes 2m lead
Size: 55Ø*70D
Cutout: 40Ø

GREERTON

IL1105H-BK

IP65 Stainless

Colour: Black



Deck recessed LED
Constant current driver required
Dimmable
350ma 1W 3K LED
Includes 2m lead
Size: 55Ø*70D
Cutout: 40Ø

GLEN AFTON

IL1105C-ST

IP65

Colour: Stainless 316



Two way directional
Constant current driver required
Dimmable
350ma 1W 3K LED
Includes 2m lead
Size: 55Ø*70D
Cutout: 40Ø

SPOTSWOOD

IL1105D-ST

IP65

Colour: Stainless 316



Three way directional
Constant current driver required
Dimmable
350ma 1W 3K LED
Includes 2m lead
Size: 55Ø*70D
Cutout: 40Ø

OHOPE

IL1106BR
IL1106ST

IP65

Colour: Raw Brass, Stainless



Constant current driver required
350ma 1W 3K LED
Beam angle: 25°
Includes 2m lead
Output: 80 Lumen
Size: 24Ø*35D
Cutout: 17Ø

OUTDOOR INGROUND

WIRING

Joins in cable must be IP68 rated

MULTIPLE WIRING -12V

Wire in parallel, use only garden (stranded) cable.
The electrician is required to do voltage drop calculation.

POWER SUPPLIES

Order drivers separately - see Drivers section

MOSGIEL

HL7312



IP65 Medium duty in-ground
Colour: Stainless 316, Raw copper

12V LED GU5.3 (MR16 two pin lamp)
Plastic sleeve & 2m cable included
Lamp suggested: GEMR-LIVE
Trim size: 100Ø, depth 120mm

BELMONT

CL3B-ST & CL3B-BR



IP65 Medium duty in-ground
Colour: Stainless 316 grade, Solid brass

12V LED GU5.3 (MR16 two pin lamp)
Plastic sleeve & 1.5m cable included
Lamp suggested: GEMR-LIVE
Trim size: 100Ø, depth 110mm
Trim: 6mm

CAMBRIDGE

IL2405



IP65 Medium duty in-ground
Colour: Stainless 316

12V LED GU5.3 (MR16 two pin lamp)
Plastic sleeve & 1.8m cable included
30° Lamp tilt
Lamp suggested: GEMR-LIVE
Trim size: 150Ø*115D
Tube size: 140Ø*170D

RAETAHI

IL3108-TWO & IL3108-FOUR



IP65 Medium duty in-ground
Colour: Stainless 316

12V LED GU5.3 (MR16 two pin lamp)
Plastic sleeve & 2m cable included
Lamp suggested: GEMR-LIVE
Trim: 88Ø*130D
(100mm without sleeve)

Landscape

HUNTLY

HL3104

IP54 Double pole spot
Colour: Raw copper



Including spike
12V LED
Order lamp: GEMR
Pole height: 800H
Lead length: 2m

TE PUNA

HL3105

IP54 Double pole spot
Colour: Stainless 316



Including spike
12V LED
Order lamp: GEMR
Pole height: 800H
Lead length: 2m

TAMAHERE

HL7354/2.800SP

IP54 Aluminium double spot
Colour: Black



Including spike
12V LED
Order lamp: GEMR
Lead length: 2m

MERCER

HL7354.800SP IP54 Aluminium single spot
Colour: Black, Silver



Including spike
12V LED
Order lamp: GEMR
Lead length: 2m

TAKAPUNA

SP607 IP65 Polycarbonate
Colour: Black



12V LED
Order lamp: GEMR
Size: 80Ø*110. Spike 270mm

PIRONGIA

CL3BU IP64
Colour: 316 Stainless steel or Brass



12V LED
Order lamp: GEMR
Lead length: 2m

HL7354-COWL, HL1705-COWL,
HL7055-COWL

IP54 Aluminium single spot
Colour: Black, Stainless, Copper



Anti glare cowl
Simply screws on

WIRING

- Joins have to be fully IP rated
- Use only direct burial garden cable (stranded) of correct rating

MULTIPLE WIRING - 12V

- Wire in parallel using driver suitable for long distance
- Electrician is required to do voltage drop calculation

SUGGESTED MR16 LAMP

GEMR-LIVE (4W) or GEMR-WORK (5.5W) for excellent light & reliability

STAINLESS SUITABILITY

316 grade is suitable for all outdoor conditions

ALUMINIUM SUITABILITY


Most die-cast aluminium products are not suitable for harsh coastal conditions, consider alternatives such as stainless, plastic, brass, copper

COPPER AND BRASS CHARACTERISTICS

As with other raw copper and brass outdoor products these fittings will darken over time

ANAKIWA


HL7055-SP IP54
Colour: Raw copper

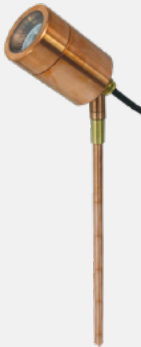

12V LED
Order lamp: GEMR
Lead length: 2m

HANMER

HL7056-SP IP54
Colour: Raw copper



12V LED
Order lamp: GEMR
Lead length: 2m

LUGGATE

HL1705-SP IP54
Colour: 316 Stainless steel



12V LED
Order lamp: GEMR
Lead length: 2m

MOUTERE

HL1706-SP IP54
Colour: 316 Stainless steel



12V LED
Order lamp: GEMR
Lead length: 2m

TAKAKA

HL7354SP IP54 Aluminium
Colour: Black



12V LED
Order lamp: GEMR
Lead length: 2m

GRANITY

HL7356SP IP54 Aluminium
Colour: Black



12V LED
Order lamp: GEMR
Lead length: 2m

HAVELOCK

HL3055SP IP54
Colour: Raw brass



12V LED
Order lamp: GEMR
Lead length: 2m

HOKITIKA

CL3BU-SP IP64 Stainless
Colour: 316 Stainless steel



12V LED
Order lamp: GEMR
Lead length: 2m

DRIVERS



V6- 40 -12V Size: 176*58*31
V6-100-12V Size: 186*64*39
V6-150-12V Size: 191*70*40
V6-200-12V Size: 191*70*40
Q2-12V-75W Size: 185*63*40

IP67 Constant Voltage drivers
Input: 240V
Output: 12V
Protection: Open circuit, short circuit, overload, over heating
Dimmable options available.



Bollards & Pathlights

SUITABILITY

General outdoor, excluding seaside

OPTIONS - 12V or 240V

Newer buildings have RCD systems which are very sensitive to moisture. The 12V bollards eliminate this issue, but require common wiring using a remote power supply.

INSTALLATION


Careful & well planned installation is essential. Ensure all joins are fully IP68 waterproof. Bollards should not be buried in the ground or have soil packed around the base. Resultant problems include condensation inside the bollard & paint issues. Ideally install on a plinth above ground. Avoid very wet areas.

LAMP CHOICE

Use quality lamps for non-integrated fittings to avoid regular replacement

KAIPARA

BL1600.600 & BL1600.1000

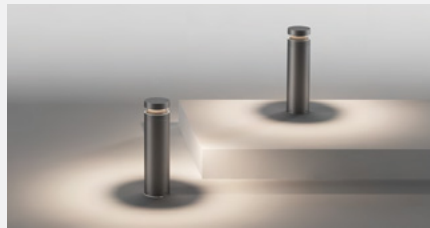

Integrated driver & lamp
360° beam
240V 24W 3K LED
Output: 2100 lumen
Size: 600H*160Ø
Size: 955H*160Ø

BL1600-SHIELD
Clip in shield to create
180° beam
Colour: Black



IP65 Die cast aluminium & PC diffuser
Colour: Black

DRURY

BL1700



Integrated driver & lamp
Light output is down only
240V 22W 3K LED
Output: 1900 lumen
Size: 900H*160W*160W

IP65 Die cast aluminium
Colour: Black



KERIKERI

HL1102



12V AC
Replaceable G4 lamp (included)
Remote transformer required
Lead length 2m
Size: 500mm High, Shade 160mm dia,
plastic spike 210mm long

IP54 Brass
Colour: Natural brass, plastic spike



SILVERDALE

HL7058.650-L, HL7058.900-L
HL7058.650-12V, HL7058.900-12V

Option 1:
HL7058.650-L, HL7058.900-L
Lamp included: GE-Brightstik-6W or 10W,
3K or 4K
240V E27 lampholder
Size: 650H or 900H*90Ø
Base: 143Ø

Option 2:
HL7058.650-12V, HL7058.900-12V
12V G6.35 lampholder
Remote driver required
Replaceable LED lamp included
GEMR-WORK 3K or 4K
Size: 650H or 900H*90Ø
Base: 143Ø



IP44 Die cast aluminium
Colour: Black, Graphite



Commercial

Commercial Downlights

COMMERCIAL DOWNLIGHTS

SUITABILITY
Commercial indoors

COMPATIBILITY
Use only drivers supplied to ensure compatibility

PHOTOMETRIC DATA
Available on request

MAHIA
RD07B-32W IP65 Aluminium & steel
Colour: White, Black



240V 32W SMD LED
CCT Switchable 3K,4K,5.7K
65° Tilt
Triac dimmable
Output: 3800-4200 lumen, 90° Beam
Size: 235*145W*118H
Cutout: 220*130W
Classification: IC-F SCB 25mm,
HCB 25mm



TOKOMARU
DL404 IP44 Aluminium
Colour: White, Black



240V 25W LED
CCT Switchable 3K,4K,5.7K
Triac dimmable
Output: 2120-2520 lumen 90° beam
Size: 190Ø*55D.
Cutout: 160-170Ø
Classification: IC-F SCB 50mm
HCB 50mm



TURANGI
DL416 IP44 Aluminium
Colour: White



240V 25W 3K or 4K LED
Non dimmable
Output: 2300 lumen 90° beam
Size: 228Ø*55H.
Cutout: 205Ø
Classification: IC-F SCB 50mm HCB 50mm

TIRI
DL418 IP44 Aluminium
Colour: White



240V 35W LED
CCT Switchable 3K,4K,5.7K
Triac dimmable
Output: 3200 lumen 90 degree beam
Size: 228Ø*45H
Cutout: 205Ø
Classification: IC-F SCB 50mm
HCB 50mm



WAITOKI
DL316 IP20 Aluminium
Colour: White, Black, Chrome



240V 25W LED
CCT Switchable 3K,4K,5K
80° tilt
Triac dimmable
Output: 2250-2550 lumen
Beam Angle: 60°
Size: 180Ø*100D.
Cutout: 160-170Ø
Classification: CRI 90, SCB 50mm



MOTU
DL169 IP54 Aluminium & steel
Colour: White, Black



240V 25W LED
CCT Switchable 3K,4K,5K
Non dimmable
Output: 1700-2300 lumens,
Beam Angle: 60°
Size: 120Ø*144H



RUATOKI
DL34 IP20 Aluminium
Colour: White



240V 25W LED
CCT Switchable 3K,4K,5.7K
Triac Dimmable
Output: 1920-2300 lumen
Beam Angle: 90°
Size: 190L*190W*54D
Cutout: 165L*165W
Classification: IC-F



AOTEA
DL419 IP44 Aluminium
Colour: White



240V 35W LED
CCT Switchable 3K,4K,5.7K
Triac dimmable
Output: 3820-4500 lumen
90 degree beam
Size: 280Ø*52D
Cutout: 230-260Ø
Classification: IC-F SCB 50mm
HCB 50mm



RAKINO
DL229 IP40 Aluminium & clear PC diffuser
Colour: White



240V 25W 3K or 4K LED
Non dimmable
Output: 2700 lumen 60 degree
Size: 145Ø*80H
Cutout: 120Ø
Classification: IC-F

PONU
DL5022 IP54 Aluminium & PC diffuser
Colour: White



240V 25W LED
CCT Switchable 3K,4K,5K
Triac dimmable
Output: 1700-2400 lumen 60° beam
Size: 190Ø*75D
Cutout: 160-170Ø
Classification: IC-F SCB 25mm
HCB 25mm



MOHAKA
DL285 IP54 Recessed
Colour: Stainless 316, Black, White



240V 25W LED 3K or 4K
Triac dimmable
Output: 2150-2750 lumen, 60°
CRI: 80
Size: 172Ø*95H
Cutout: 150-165Ø
Classification: IC-F

HAWEA
DL362 IP44 Aluminium
Colour: White



Low glare design
240V 30W LED 3K or 4K
Triac dimmable
Output: 3650 lumen 36°
CRI: 90 UGR<19
Size: 240Ø*142H
Cut out: 195-225Ø
Classification: IC-F

INVERCARGILL
DL363 IP44 Aluminium
Colour: White



Low glare design
240V 30W LED 3K or 4K
Triac dimmable
Output: 3650 lumen 36°
CRI: 90 UGR<19
Size: 190Ø*120H
Cut out: 160-170Ø
Classification: IC-F

PORONUI
NS208-25W IP20 Cast aluminium
Colour: White, Black



Surface mount, swivel & tilt
240V 25W CCT Selectable 3K,4K,5K
Triac dimmable
Output: 2040-2900 lumen
Beam angle: 36°
Head size: 85Ø*211L



PUHOI
NS207-15W IP20 Cast aluminium
Colour: White, Black



Surface mount, swivel & tilt
240V 15W 3K or 4K or CCT Switchable LED
Triac dimmable
Output: 1230-1420 lumen
Beam angle: 36°
Head size: 85Ø*186L



Commercial Track Lights

COMMERCIAL TRACK LIGHTS

CHATHAM

HW1206 IP20 Die cast aluminium
Colour: White, Black



240V 30W LED 2.7K,4K,6K Selectable
Dimmable
CRI: 90
Output: 2400 lumen, 36 degree
Reflector options: 24, 36, 50 degree
Head size: 103Ø*180L



BLLENHEIM

HW119 IP20 Aluminium
Colour: White, Black



240V 25W 3K,4K,5K Selectable
Dimmable
Output: 1950 - 2450 lumen
CRI: 90
Reflector: 38°
Head size: 68Ø*175L



KARORI

HW1440 IP20 Die cast aluminium
Colour: White, Black



240V 30W LED
CCT Selectable 2.7K,4K,6K
Dimmable
CRI: 90
Output: 1900 lumens, 36°
Reflector options: 24, 36, 50°
Head size: 90Ø



KAWARAU

HW148 IP20 Aluminium
Colour: White, Black



Selectable: 10W/15W/20W
Output: 820-1950 lumens
CCT Selectable: 3K, 4K or 5K
CRI: 90
Triac dimmable
Beam angle adjustable: 24-60°
Head size: 65Ø*147L



FRANKTON

HW149 IP20 Aluminium
Colour: White, Black



Selectable: 20W/25W/30W/35W
Output: 1700-3850 lumens
CCT Selectable: 3K, 4K or 5K
CRI: 90
Triac dimmable
Beam angle adjustable: 24-60°
Head size: 80Ø*221L



ONEROA

HW330 IP20 Aluminium
Colour: White, Black



25W
3000lm
CCT Selectable: 3K or 4K
Beam angle: 36° reflector.
Reflector options: 15°, 24° or 60°
CRI: 90
Triac dimmable
Head size: 150Ø*81D



ARDMORE

HW20

IP20 Aluminium
Colour: White, Black



CCT Selectable 3K, 4K, 5K
Wattage Selectable
Beam Angle: 120°


HW20-S
600*60mm
45/50/55/60W
Lumens 2700-3600

HW20-M
1200*60mm
35/40/45/50W
Lumens 5250-7500

HW20-L
1500*60mm
18/20/22/24W
Lumens 6750-9000

TRACK

HW4



HW4-2.0
HW4-3.0


Colour: White, Black

240V 16 Amp, 3 circuit
Surface mount or suspended commercial track
Three live conductors
End feed & end cap priced separately
Length options: 2m, 3m. Cut to any length
Size: 30W*35H


Clip in track cover available (HW4COVER)
Polarity
Before ordering consider the polarity of the track layout so as to order the correct joiner components.

TRACK COMPONENTS


HW4




HW4- ECAP
End cap




HW4- JO1
Joiner



HW4- LO1
Live feed




HW4-L01-L HT4-L01-R




HW4- L02
Feed joiner




HW1205E-R
Rod spot 500mm
White





HW4- JO2
L joiner




HW4- JO2-O HW4- JO2-I




HW4- JO3
T joiner




HW4- JO4
Cross joiner



HW4- JO5
Flexible bend



HW4- JO6
Rod suspension



HW4- JO9
Suspension kit



HW-BP
Clip in base plate for
track spots
Size: 100Ø
White, Black

Lamps & Drivers

12V MR16



GE Brand 3K or 4K
Non dimmable
GEMR-LIVE (4W / 400 Lumens)
GEMR-WORK (5.5W / 550 Lumens)

240V GU10



GE Brand 3K or 4K
Non dimmable
GEGU-LIVE (4W / 400 Lumens)
Dimmable
GEGU-WORK (6W / 600 Lumens)


GE-BRIGHTSTIK



GE-BRIGHTSTIK-6W
240V 6W 3K or 4K
GE-BRIGHTSTIK-10W
240V 10W 3K or 4K
General purpose LED - GE brand
E27 Non dimmable
Output: 810 lumen
Beam: 240 degrees
Life: 15000 hours
Size: 37Ø*115L incl thread

G4

G4-1W 3K



12V G4 Non dimmable
G4-1W 3K
Size: 9Ø*25L excl pins
Use specified CV driver


G9



240V G9 Non dimmable
G9-4W 3K
Size: 24Ø*55L excl pins
No driver required

MODULE KIT FOR DOWNLIGHTS

MOD5-8WKIT




Output: Switchable 5W-8W output
CCT Selectable 2.7K,3K,4K,6.5K
Quick connect driver with looping terminals

Classification: IC-F
Abut & cover.
Can install under insulation.
Distance to timber building elements 25mm




DISC R (REAR PIN OPTION)



12V G4
Non dimmable
Use specified driver
Voltage 10V-35V
DISC-1.5WR 3K, 4K
Suitable for modern boats
Size: 30Ø


DISC



12V G4 Non dimmable
DISC-1.5W 3K, 4K
Use specified driver
Voltage 10V-35V
Suitable for modern boats
Size: 30Ø

CORN-G4

12V G4



12V G4 Non dimmable
CORN-3.5W 3K
CORN-2W 3K, 4K
Use specified CV driver
Size: 12Ø*32L excl pins

CORN-G6.35

12V MR16



12V G6.35 Non dimmable
G6.35-4W 3K
Use specified CV driver
Size: 18Ø*35L excl pins

CONSTANT CURRENT DRIVERS

MINI-350MA-4W



IP65 Constant current
Non dimmable
Input: 100-240V
Max output: 1-4W
Output current: 350ma
Output voltage: 2-12V
Size: 38L*27W*21H

LMVC8AI-UNI



Constant current
Non dimmable
Input: 100V-240V
Max output: 1-9W
Output current: 350mA
Output voltage: 3-26VDC
Size: 85L*40W*23H

MINI-350MA-12W



IP65 Constant current
Non dimmable
Input: 100-240V
Max output: 5-12W
Output current: 350ma
Output voltage: 12-35V
Size: 50L*48W*24H

LSC20W350P-UNI



IP20
Constant current
Non dimmable
Input: 100-277V
Max output: 11-19.3W
Output current: 350ma
Output voltage: 32-55Vdc
Size: 42W*52W*15H

DIM500MA/12W



Constant current
Dimmable with trailing edge dimmer
Input: 220-240V
Max output: 6-12W
Output current: 500ma
Output voltage: 12-24V
Size: 100L*40W*23H

Q4-12W-CC



Constant current
Dimmable
Input: 200V-240V
Max output: 6-12W
Output current: 330mA
Output voltage: 20-40VDC
Size: 125L*45W*30H

LLVC12A-UNI



Constant current
Non dimmable
Input: 100V-240V
Max output: 6-12W
Output current: 350mA
Output voltage: 18-36VDC
Size: 170L*40W*30H

WP-350MA-12W



IP68 Constant current
Non dimmable
Input: 220-240V
Max output: 1-12W
Output current: 350ma
Output voltage: 2-35V
Size: 188L*76W*38H

Q4-350MA-20W



Constant current
Non dimmable
Input: 240V
Max output: 1-20W
Output current: 350ma
Output voltage: 2-58V
Size: 113L*44W*28H

Q8H-500MA-40W



Constant current
Non dimmable
Input: 240V
Max output: 13-40W
Output current: 500ma
Output voltage: 27-80V
Size: 142L*50W*25H

CONSTANT VOLTAGE DRIVERS

MINI-12V-4W, MINI-12V-12W



IP65 Constant voltage
Non dimmable
MINI-12V-4W
Input: 100-240V
Output: 12V
Min 1W max 4W
Size: 38L*27W*21H

MINI-12V-12W
Input: 220-240V
Output: 12V
Min 1W max 12W
Size: 50L*48W*24H

Q4-12V

Constant voltage
Non dimmable



Q4-12V-6W
Input 240V,
Output: 12V 6W
Size: 81L*39W*22D

Q4-12V-12W
Input 240V,
Output: 12V 12W
Size: 98L*39W*22D

Q4-12V-20W
Input 240V,
Output: 12V 20W
Size: 113L*44W*28

DIM12-50



DIM12-50
Constant voltage
Dimmable
Input: 240V
Output: 12V
12-50W maximum
Size: 184*61*32

Q8H

Constant voltage
Non dimmable



Q8H-12V-40W
Input: 240V
Output: 12V 40W
Size: 166L*52W*24D

Q8H-12V-50W
Input: 240V
Output: 12V 50W
Size: 184L*61W*32D

V6

IP67 Constant voltage
Non dimmable
Input: 100-240V



V6-40-12V
Size: 176*58*31

V6-150-12V
Size: 191*70*40

V6-100-12V
Size: 186*64*39

V6-200-12V
Size: 191*70*40

Q2

IP67 Constant voltage
Non dimmable



Q2-12V-75W
Input: 240V
Output: 12V 75W
Size: 185L*63W*40D

V2

IP67 Constant voltage
Dimmable drivers



V2-100-12T
Size: 165*70*40
Output: 12V,
36W-100W Max

V2-100-24T
Size: 165*70*40
Output: 24V,
36W-100W Max

V2-200-24T
Size: 225*70*40
Output: 24V,
70-200W Max

Q3

Constant voltage
Non dimmable



Q3-24V-50W
Input: 240V
Output: 24V 50W
Size: 182L*60W*32D

Q3-24V-36W
Input: 240V
Output: 24V 36W
Size: 140L*50W*35D

Q3-24V-75W
Input: 240V,
Output: 24V 75W
Size: 182L*60W*32D

DIM24-50



DIM24-50
Constant voltage
Dimmable
Input: 240V
Output: 24V
12-50W maximum
Size: 184*61*32

Index

INDEX BY CODE

AL17	12	DL34	44	HL3104	39	IL1105H-CO	37
ALP017	21	DL350	5	HL3105	39	IL1105H-ST	37
ALP018	21	DL361	6	HL4511	35	IL1105HBR-EYE	36
ALP019	21	DL362	44	HL531	24, 35	IL1106BR / IL1106ST	37
ALP020	22	DL363	44	HL532	35	IL2405	38
ALP707	22	DL37	29	HL5541L & HL5541	35	IL3104	36
AP101C	20	DL38	30	HL7031	33	IL3108-TWO & IL3108-FOUR	38
AP104C	20	DL401	7	HL7032	33	LDL-C01	27
AP110C	20	DL402	7	HL7033	33	LDL-E01	27
AP112C	20	DL403	7	HL7034	33	LDL-W01	27
AP116C	20	DL404	45	HL7041	33	LDL1927	27
AP133C	20	DL407	7	HL7043	33	LDL68	27
AP176C	20	DL408	7	HL7051	33	LLVC12A-UNI	51
BL1600.600 & BL1600.1000	42	DL416	45	HL7052	33	LMVC8AI-UNI	51
BL1700	42	DL418	45	HL7053	33	LS2555	17
C114-12W	11	DL419	45	HL7054	34	LS5080	17
C114-12W	30	DL43	4	HL7055-SP	40	LSC20W350P-UNI	51
C115D-18W & C116D-25W	11	DL5022	45	HL7056-SP	40	MB113-12W	25
C115D-18W & C116D-25W	30	DL54	7	HL7058	42	MB537 (MB537-8W / MB537-12W)	25
C117-18W	11	DL55	7	HL7070	34	MB542-8W	25
CL104B	5	DL56	7	HL7071	34	MB550-12W	26
CL350	5	DL593	5	HL7142	34	MB666	26
CL3B-ST & CL3B-BR	38	DL71	6	HL7312	38	MB704	25
CL3BU	39	DL77	5	HL7354	34	MB709	26
CL3BU-SP	41	DT0101	9	HL7354-2B	34	MINI-12V-12W	52
CL76	4	EL270UP	35	HL7354-2P	34	MINI-12V-4W	52
CL78	4	FL01	35	HL7354.800SP	39	MINI-350MA-12W	51
CL87-18W & CL87-25W	11	FS-12V-15W	23	HL7354/2.800SP	39	MINI-350MA-4W	51
CL87-18W & CL87-25W	30	FS-12V-25W	23	HL7354SP	40	MOD5-8WKIT	50
CORN-G4	50	FS-12V-4.8W	23	HL7355	34	MT-2M	19
CORN-G6.35	50	FS-12V-9.6W	23	HL7356SP	40	MT-DB	19
DA921	6	FS-24V-15W	23	HL7472	36	MT-J / MT-LJ / MT-EC / MT-CS	19
DB08-600 & DB08-1200	12	FS-24V-17W-RGBW	23	HL75	32	MT60	19
DB10 (DB10-600/1200/1500)	12	FS-24V-25W	23	HSP294100	14	MT62	19
DB21	12	FS-COB-24V-10W	23	HSP295	14	MT66	19
DG-F03	8	FS-COB-24V-15W	23	HSP37	14	MT72	19
DG-F03D	8	FS-Controller	23	HT TRACK	15	NS207-15W	10, 45
DIM12-50	52	FS-SAUNA	23	HT-ECAP / HTC-ECAP	15	NS208-25W	45
DIM24-50	52	G4-1W	50	HT-JO1 / HTC-JO1	15	NS214	6
DIM500MA/12W	51	G9-4W	50	HT-JO2 / HTC-JO2	15	NS215	10
DISC-1.5W	50	GE-BRIGHTSTIK-10W	50	HT-JO3	15	NS215B	10
DISC-1.5WR	50	GE-BRIGHTSTIK-6W	50	HT-JO4	15	NS216	10
DL103A	5, 29	GEGU-LIVE	50	HT-JO5	15	NS226	10
DL104A	5, 29	GEGU-WORK	16, 50	HT-JO9	15	NS227	10
DL138	5	GEMR-LIVE	50	HT-LO1 / HTC-LO1	15	NS230	10
DL169	30	GEMR-WORK	50	HT-LO2	15	P013AM	9
DL169	44	HBS-NB	48	HTC TRACK	15	P5025	9
DL17	4	HBS-PD	48	HTC-FO1	15	PT115	9
DL201	6	HBS-WB	48	HW119	46	PT20	9
DL202	6	HL104	35	HW1206	46	PT227	9
DL22	4	HL1102	42	HW1440	46	PX36001	9
DL222	8	HL1705-SP	40	HW148	46	PX36008	9
DL229	45	HL1706-SP	40	HW149	46	PX36025	9
DL24	4	HL2211	32	HW20	46	Q2-12V-75W	41, 52
DL284	6	HL2221	32	HW330	46	Q3-24V-36W	52
DL285	44	HL2471	36	HW4	47	Q3-24V-50W	52
DL30	7	HL2621	31	IL1105C-ST	37	Q3-24V-75W	52
DL301	6	HL2691	32	IL1105D-ST	37	Q4-12V-12W	52
DL302	6	HL2891	32	IL1105EYE	36	Q4-12V-20W	52
DL316	44	HL3055SP	41	IL1105H-BK	37	Q4-12V-6W	52
DL333	5, 29	HL3062	35	IL1105H-BR	37	Q4-12W-CC	51

Q4-350MA-20W	51
Q8H-12V-40W	52
Q8H-12V-50W	52
Q8H-500MA-40W	51
RD07B-32W	44
SA100	13
SA150	13
SA294CD-13W	13
SA294CR-13W	13
SA300	13
SL3301-LED8W-KIT / SL3301-NON-IC	29
SL3302-LED8W-KIT / SL3302-NON-IC	29
SL60LT & SL60ST	49
SP607	39
SR800D-13W	13
TL66 & TL66-UD-1500	18
UHB200	48
UHB200-PD	48
UHB200-SHADE	48
UL2700	32
UL2701	32
UL3400	11, 30
UL4101	31
UL4102	31
UL7710	31
UL7715	31
UL7720	31
UL9400	36
UL9500	36
UL9600	36
UL9700	36
V2-100-12T	52
V2-100-24T	52
V2-200-24T	52
V6-100-12V	52
V6-150-12V	52
V6-200-12V	52
V6-40-12V	52
VA506	52
W1705	32
W1800D	24
W1933-20 & W1933-16	24
W50	26
W60	24
W633-12W	24
W641	25
W70	26
W80	24
WDG-70mm / WDG-78mm	24, 32
WP-350MA-12W	34
WS372B	51
WS373B	16
WS374B	16
WS37MBP	16
WS37SW	16

INDEX BY NAME

AHURORA	32	KAIPARA	42
AKAROA	36	KAITERITERI	13
ALBANY	10	KARAKA	30
ALEXANDRA	32	KARAMEA	6
AMBERLEY	35	KAREKARE	24
ANAKIWA	40	KARORI	46
AOTEA	45	KAWARAU	46
ARDMORE	46	KERIKERI	42
ARROWTOWN	32	KINGSTON	32
AVALON	6	KUMARA	36
BALCLUTHA	34	KUROW	7
BALFOUR	33	LINCOLN	6
BELMONT	38	LITTLE KAITERITERI	13
BENMORE	5, 29	LUGGATE	40
BLenheim	46	LUMSDEN	32
BLUFF	7	MAHIA	44
BRETT	36	MAKARORA	5
BULLER	6	MAKETU	37
CAMBRIDGE	38	MANAPOURI	34
CARDRONA	33	MANAWATU	27
CHATHAM	46	MANDEVILLE	33
CHEVIOT	35	MANGAWHAI	25
CLARKS BEACH	14	MANGONUI	9
CLEVEDON	17	MAPUA	48
CLYDE	34	MATAPOURI	32
CLYDEVALE	34	MATARANGI	10
COACH	35	MATATA	36
CORN LAMP	50	MATATA	36
COROGLEN	5	MATAURA	34
CORONET	25	MATAURI	11, 30
CROMWELL	7	MAYFIELD	35
DALEFIELD	32	MCKENZIE	4
DANNEVIRKE	26	MERCER	39
DENNISTON	31	MILFORD	7
DIPTON	33	MILTON	26
DRURY	42	MOHAKA	44
DUNSTAN	5, 29	MOKOHINAU	18
EGMONT	27	MONOWAI	14
ELTHAM	13	MOSGIEL	38
FITZROY	13	MOSSBURN	33
FRANKTON	46	MOTU	30, 44
GLEN AFTON	37	MOTUEKA	48
GLENTANNER	9	MOUTERE	40
GRANITY	40	MURCHISON	31
GREERTON	37	MURIWAI	5
HAAST	6	NASEBY	24
HAHEI	29	NELSON	6
HANMER	40	NEWSTEAD	31
HAREWOOD	35	NGAROTO	26
HAURAKI	31	OAMARU	7
HAVELOCK	41	OHOKA	36
HAWEA	44	OHOPE	37
HERIOT	32	OKAREKA	16
HERMITAGE	25	OKATAINA	16
HIKURANGI	11	OMAHA	27
HOKITIKA	41	OMANA	11, 30
HUNTLY	39	OMARAMA	24
HUNUA	17	ONEROA	46
INVERCARGILL	44	OPOTIKI	33
JOHNSONVILLE	48	ORETI	31
KAIKOURA	6	OXFORD	24, 35

PAPAMOA	33
PICTON	5
PIPIWAI	12
PIRONGIA	39
PONUI	45
PORIRUA	48
PORONUI	45
PORTLAND	24
PUHOI	10, 45
PUKEHINA	37
PUKEKOHE	29
PUKETI	34
PUNAKAIKI	12
RAETAHI	38
RAKINO	45
RANFURLY	10
RANGIORA	35
RANGIRIRI	13
REEFTON	6
RICHMOND	48
RIVERSDALE	33
ROTOITI	16
ROTORUA	16
ROUTEBURN	27
ROXBURGH	26
RUAKAKA	9
RUAPUNA	35
RUATOKI	44
RUATORIA	14
RUAWAI	10
SILVERDALE	42
SPOTSWOOD	37
STRATFORD	26
SUMNER	31
TAIPA	36
TAKAKA	40
TAKAPUNA	39
TAMAHERE	39
TARAWERA	16
TARRAS	7
TASMAN	4
TAUPO	4
TAWA	48
TE ANAU	7
TE HANA	10
TE KOUMA	5
TE KUITI	36
TE PUKE	37
TE PUNA	39
TEKAPO	24
THAMES	29
THORNDON	25
TIKIPUNGA	11, 30
TIMARU	7
TIRI	45
TITOKI	11, 30
TOKOMARU	45
TONGARIRO	27
TOTARANUI	24, 32
TRYPHENA	12
TUAKAU	13

TUAPEKA	34
TURANGI	45
WAIAKE	36
WAIANIWA	6
WAIKAKA	33
WAIKARI	12
WAIMATE	25
WAIOURU	4
WAITOKI	44
WAITOMO	4
WAIWERA	8
WANAKA	7
WARKWORTH	8
WELLINGTON	4
WELLSFORD	10
WESTPORT	8
WHANGAMATA	5
WHITIANGA	5
WINTON	34

Warranty & Lighting Design

Lighting Design Solutions

Our experienced lighting designers create stunning spaces through innovative lighting solutions.

From residential to commercial projects, we provide detailed plans, which include fixture selection, placement, and project scheduling. With our support, we can help transform your projects with lighting designs that impress.

Find out more on our website
prolux.co.nz



Prolux Lighting 5 Year Warranty

Thank you for choosing Prolux Lighting for your lighting needs. We are committed to providing high-quality and reliable lighting solutions and we back our products with a 5-year warranty to ensure your satisfaction.

See our website for our full warranty policy.



proluxTM
lighting