



Lighting Catalogue

Downlights	4
Buttons & Battens	12
Residential Spots	14
Linear	18
Indoor Wall Lights	24
Cabinet Recessed	27
Stair Lights	28
Outdoor	29
Commercial	47
Lamps & Drivers	55
Index	59



Indoor

Downlights

COB DOWNLIGHTS

A more versatile and architectural type of lighting.

The use of reflectors provides different beam spreads and focussing which allows for more sophisticated lighting design.

WELLINGTON

DL22

IP40 Aluminium
Colour: White, Black



Adjustable 30° tilt
240V 10W CCT 3K,4K,5K Selectable LED
Triac dimmable
Output: 800 lumen CRI90
Beam angle: 36°
Size: 85Ø*80H
Cutout: 75Ø
Classification: IC-F



WAIOURU

DL24

IP40 Aluminium
Colour: White



Adjustable 30° tilt
240V 13W CCT 3K,4K,5K Selectable LED
Triac dimmable
Output: 950 lumen CRI90
Beam angle: 36°
Size: 100Ø*94H
Cutout: 90Ø
Classification: IC-F



TAUPO

DL17

IP40 Aluminium
Colour: Black, White



Fixed beam anti glare
240V 10W CCT 3K,4K,5K Selectable LED
Triac dimmable
Output: 800 lumen CRI90
Beam angle: 36°
Size: 80Ø*90H
Cutout: 75Ø
Classification: IC-F



WAITOMO

DL43

IP20 Aluminium
Colour: White



Fixed beam anti glare
Suited to larger areas or high stud
240V 13W 3K LED
Triac dimmable
Beam angle: 42°
Output: 1430 lumen, CRI80
Size: 92Ø*90H
Cutout: 83Ø
Classification: IC-F

TASMAN

CL76

IP40 Aluminium
Colour: White, Black



240V 10W 3K LED
Tilt 25°
Triac dimmable
Output: 770 lumen 60 degree beam, CRI80
Size: 95Ø*55H.
Cutout: 85Ø (will fit 82-88mm)
Classification: IC-F

MCKENZIE

CL78

IP54 Aluminium
Colour: White, Black



240V 8W 3K LED
Tilt 30°
Triac dimmable
Output: 530 lumen 60 degree beam
Size: 80Ø*50H
Cutout: 70Ø
Classification: IC-F

COROGLEN

DL350

IP44 Aluminium
Colour: White

240V 10W 3K LED
 Triac dimmable
Beam angle: 36°
Output: 900 lumen, CRI80
CRI: 80
Size: 90mm Ø*70H
Cutout: 75mmØ
Classification: IC-F

TE KOUMA

CL350

IP44 Aluminium
Colour: White

Adjustable 25° tilt
 240V 8W 3K,4K,5K Selectable LED
 Triac dimmable
Output: 700 lumen, CRI90
Beam angle: 36°
Size: 90mm Ø*70H
Cutout: 75mmØ
Classification: IC-F

**PICTON**

DL77

IP20 Aluminium
Colour: White, Black

Tilt 45° swivel 350°
 240V 10W 3K LED
Output: 800 lumen, CRI80
Beam angle: 24°
Size: 96Ø*70H
Cutout: 85Ø
Classification: IC-F

MURIWAI

DL138

IP40 Aluminium
Colour: White

240V 3.3W 3K LED
 Tilt 20°
 Non dimmable
Beam angle: 32°
Output: 180 lumen, Ra80, CRI80
Size: 50Ø*32H
Cutout: 45Ø
Classification: IC-F

WHANGAMATA

DL333

IP54 Aluminium
Colour: White

240V 6W COB LED
 CCT selectable 3K, 4K, 5.7K
 Triac dimmable
Tilt: 30°
Output: 450-600 lumen, CRI80
Beam angle: 60°
Size: 95Ø*73mm high
Cutout: 78-85mm Ø
Classification: IC-F, Fire rated for 90 minutes to BS476 standard

**WHITIANGA**

DL593

IP65 Aluminium
Colour: White

240V Non-integrated fitting
 GU10 lamp (sold separately)
Size: 100Ø*95H
Cutout: 70mm Ø
Classification: IC-F

DUNSTAN


DL103A

IP65 Waterproof on front face
Colour: White, Black

240V 8W CCT Selectable 3K, 4K, 5K LED
 Indoor/Outdoor
 Triac dimmable, Beam angle 60°
Output: 700 lumen
Size: 80Ø*40H
Cutout: 70Ø
Classification: IC-F

**BENMORE**

DL104A

IP65 Waterproof on front face
Colour: White, Black

240V 8W 3K LED
 Indoor/Outdoor
 Triac dimmable
Output: 700 lumen, CRI80
Beam angle: 60°
Size: 80W*80W*40H
Cutout: 70Ø
Classification: IC-F

MAKARORA

CL104B


IP65 Aluminium
Colour: White, Black

240V 10W 3K LED
 Tilt 30°
 Triac dimmable
Output: 800 lumen 36° beam
Size: 90*90W*40H
Cutout: 75Ø
Classification: IC-F

HAAST

DL71

IP65 Aluminium
Colour: White, Black



240V 8W 3K COB LED
Tilt 30°
Triac dimmable
Output: 800 lumen, CRI80
Beam angle: 36°
Size: 80*80W*40H
Cutout: 70Ø
Classification: IC-F

NELSON

DA921

IP44 Aluminium anti-glare
Colour: White, Black



240V 8W 3K LED
Triac dimmable
Beam angle: 36°
Output: 600 lumen, CRI90
Size: 85W*85W*80D
Cutout: 75Ø round
Classification: IC-F

REEFTON

DL301

IP44 Aluminium
Colour: White



240V 13W CCT 3K,4K, 5.7K Selectable LED
Triac dimmable
Beam angle: 60°
Output: 700 lumen, CRI 80
Size: 110Ø*55H
Cutout: 90Ø
Classification: IC-F



BULLER

DL302

IP44 Aluminium
Colour: White



240V 18W 3K or 4K LED
Triac dimmable
Beam angle: 60°
Output: 2000 lumen
Size: 145Ø*62H
Cutout: 120Ø
Classification: IC-F

WAIANIWA

DL361

IP44 Aluminium
Colour: White



240V 13W CCT 3K,4K,5K Selectable LED
Triac dimmable
Output: 1250 lumen
CRI: 90. 36 degree beam UGR<19
Size: 150mm Ø*95H
Cutout: 120-130Ø
Classification: IC-F



LINCOLN

DL284

IP65 Aluminium
Colour: White




240V 18W 3K or 4K LED
Triac dimmable
Output: 1950 lumen
CRI: 80. 60° beam
Size: 145mm Ø*82H
Cutout: 125-135Ø
Classification: IC-F

KAIKOURA

DL201

IP20 Aluminium gimble
Colour: White, Black, Silver

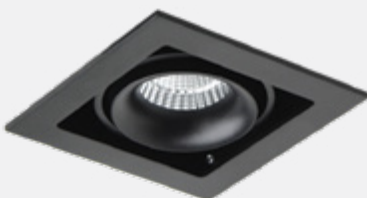


240V 9W 3K LED
22° Tilt and 355° Swivel, Beam 36°
Triac dimmable
Output: 1173 lumen CRI80
Size: 110*110*105H
Cutout: 97*97
Classification: IC-F

AVALON

DL202

IP20 Aluminium gimble
Colour: White, Black, Silver

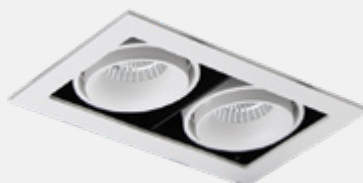


240V 18W (2x9W) 3K LED
Triac dimmable, 22° Tilt and 355° Swivel
Output: 2346 lumen CRI80
Beam angle: 36°
Size: 200*110*105H
Cutout: 185*97
Classification: IC-F

LINTON

DL260

IP20 Aluminium
Colour: White

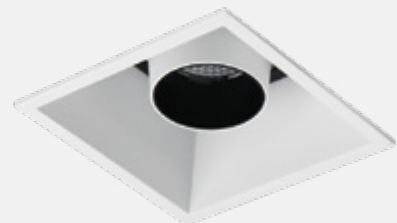

240V 9W 3K LED
Triac dimmable, Tilt 20° swivel 355°
Beam angle: 30°
Output: 1135 lumen CRI80
Size: 92*92*113H
Cutout: 86*86 mm
Classification: IC-F

KAIAPOI

DL262

IP20 Aluminium
Colour: White

240V 18W (2x9W) 3K LED
 Triac dimmable, Tilt 20° swivel 355°
Beam angle: 30°
Output: 2270 lumen CRI80
Size: 174*92*113H
Cutout: 95Ø
Classification: IC-F

FOXTON

DL264

IP20 Aluminium
Colour: White

Tilt 20° swivel 355°
 240V 13W 3K LED
 Triac dimmable
Output: 1660 lumen CRI80
Beam angle: 30°
Size: 91Ø*110H
Cutout: 83Ø

KARAMEA

NS214

IP20 Aluminium
Colour: White

Swivel & 45° tilt
 240V 9.5W 3K LED
 Triac dimmable
Output: 1170 lumen Ra80, CRI80
Beam angle: 48°
Size: 103Ø*90H
Cutout: 95Ø

RAGLAN

DL7001

IP40 Aluminium
Colour: White, Black

Interchangeable clip in system.
 Any trim & reflector combination.

240V 9W 3K LED
 Triac dimmable
Beam angle: 46°
Output: 1135 lumen
Size: 83*83*110H

Cutout: 76*76
Classification: IC-F
Tilt: 24°
Swivel: 350°

KAWHIA

DL7002

IP40 Aluminium
Colour: White, Black

Interchangeable clip in system.
 Any trim & reflector combination.
 Distance to timber building elements 25mm.


240V 18W (2 x 9W) 3K LED
 Triac dimmable
Beam angle: 46°
Output: 2270 lumen
Size: 153*83*110H

Cutout: 145*76
Classification: IC-F Abut
 & cover.
Tilt: 24°
Swivel: 350°

MODULE KIT FOR DOWNLIGHTS


MOD5-8WKIT

Replaceable LED module to upgrade existing halogen lamps to LED.
 Or purchase with any of our compatible downlights as a complete fitting.



Output: Switchable 5W-8W output
 CCT switch 3K, 4K, 6K
 Quick connect driver with looping terminals

Classification: IC-F
 Abut & cover.
 Can install under insulation.
 Distance to timber building
 elements 25mm

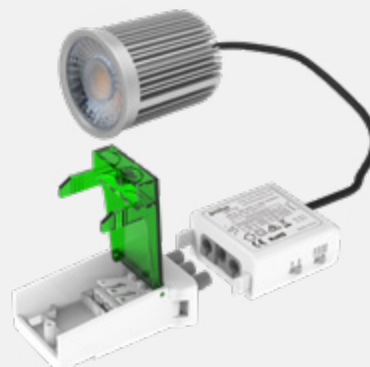

SMD DOWNLIGHTS

CROMWELL

DL401

IP44 Aluminium
Colour: White, Black,
Brushed Chrome



240V 13W CCT Selectable LED
Triac dimmable
Beam angle: 90°
Output: 950 lumen, CRI80
Size: 110Ø*45H
Cutout: 90Ø (will fit 90-98Ø)



TARRAS

DL402

IP44 Aluminium
Colour: White, Black



240V 13W CCT Selectable LED
Triac dimmable
Beam angle: 90°
Output: 950 lumen, CRI80
Size: 110W*110W*45D
Cutout: 90Ø (will fit 85-100Ø)



TIMARU

DL403

IP44 Aluminium
Colour: White, Brushed Chrome



240V 13W CCT Selectable LED
Triac dimmable
Beam angle: 90°
Output: 1100 lumen, CRI80
Size: 145Ø*55H
Cutout: 120Ø (will fit 118-135Ø)



WANAKA

DL407

IP44 Aluminium
Colour: White, Black,
Brushed Chrome



240V 13W CCT Selectable LED
Triac dimmable
Beam angle: 90°
Output: 1000 lumen, CRI80
Size: 170Ø*55H
Cutout: 140Ø (will fit 140-155Ø)



TE ANAU

DL408

IP44 Aluminium
Colour: White, Black



240V 18W 3K or 4K LED
Non dimmable
Beam angle: 90°
Output: 1700 lumen, CRI80
Size: 170Ø*55H
Cutout: 140Ø (will fit 140-150)

KUROW

DL54

IP54 Economy contractor model
Colour: White



Built in driver
240V 10W CCT Selectable LED
Triac dimmable
Beam angle: 90°
Output: 850 lumen, CRI80
Size: 115Ø*61H
Cutout: 90Ø (will fit 90-105Ø)



MILFORD

DL55

IP54 Economy contractor model
Colour: White



Built in driver
240V 13W CCT Selectable LED
Triac dimmable
Beam angle: 90°
Output: 1000 lumen, CRI80
Size: 145Ø*61H
Cutout: 125Ø (will fit 110-132Ø)



OAMARU

DL56

IP54 front face polycarbonate
Colour: White



Deep reflector, anti glare
240V 10W CCT Selectable LED
Triac dimmable
Beam angle: 90°
Output: 800 lumen, CRI80
Size: 115Ø*71H
Cutout: 90Ø (will fit 90-95Ø)



WESTPORT

DL222

IP20 Polycarbonate
Colour: White



240V 16W LED
Beam angle: 120°
Output: 1500-1800 lumen
Size: 235Ø*20D
Cutout: Changeable from 65 - 205Ø
CCT switch 3K/4K/6K



BLUFF

DL30

IP20 Aluminium
Colour: White

30 degree tilt
240V 13W CCT 3K,4K,5.7K Selectable LED
Triac dimmable
Beam angle: 90°
Output: 760 - 900 lumen
Size: 110Ø*50H
Cutout: 95Ø



PENDANT DOWNLIGHTS

See website for full range of decorative pendants.

RUAKAKA

PT227

IP20 Aluminium
Colour: Black, White
Black, White, Silver or Gold inner ring



240V 12W LED
Beam angle: 34°
Output: 965 lumen, CRI80
Size: 90Ø*150mmH 1.5M drop

MANGONUI

PT115

IP20 Aluminium
Colour: Black, White



240V 9W 965 lumen
Beam angle: 36°
Output: 1500 lumen, CRI80
Size: 60Ø*278MM high, 1.5m drop

DT0101 PENDANT



Please see website for more details

PX36001 PENDANT



Please see website for more details

PX36008 PENDANT



Please see website for more details

PX36025 PENDANT



Please see website for more details

P013AM PENDANT



Please see website for more details

P2932 PENDANT



Please see website for more details

P5025 PENDANT



Please see website for more details

SURFACE DOWNLIGHTS

PUHOI

NS207-15W

IP20 Cast aluminium
Colour: White, Black

90° Tilt and 330° Swivel
240V 15W 3K or 4K or CCT LED
Triac dimmable
Output: 1230-1420 lumen
Beam angle: 36°
Head size: 85Ø*186L



TAROTO

NS225

IP65 Aluminium
Colour: White, Black

240V 9W 3K LED
Triac dimmable
Reflector options: Black, White, Silver, Gold
Output: 1173 lumen, Beam angle 40°, CRI80
Size: 124H*75*75W
Classification: IC-F

RUAWAI

NS226

IP20 Aluminium
Colour: White, Black

240V 10W 3K COB LED
Triac dimmable
Reflector options: Black, White, Silver, Gold
Beam angle: 36°
Output: 1230 lumen, CRI80
Size: 80Ø*130H

MATARANGI

NS227

IP20 Aluminium
Colour: White, Black

240V 12W 3K COB LED
Triac dimmable
Reflector options: Black, White, Silver, Gold
Output: 1656 lumen, CRI80
Beam angle: 50°
Size: 90Ø*150H

NGATEA

NS221

IP20 Aluminium
Colour: White, Black, Champagne

240V 9W 3K LED
Triac dimmable
Output: 1200 lumen, CRI80
Beam angle: 40°
Size: 93*93W*115H

RANFURLY

NS230

IP20 Aluminium
Colour: White, Black

Optional Gold reflector
240V 12W LED 3K or 4K
Triac dimmable
Tilt and swivel
Beam angle: 36°
Output: 1230 lumen
CRI: 90
Size: 60mmØ*150mm long

WELLSFORD

NS215B

IP20 Aluminium
Colour: White

240V 9.5W 3K or 4K LED
Triac dimmable
Output: 945 lumen, CRI80
Beam: 34°. Tilt 90° swivel 350°
Size: 75Ø*91H

TE HANA

NS215

IP20 Aluminium
Colour: White, Black

240V 9.5W 3K or 4K LED
Triac dimmable
Output: 945 lumen, CRI80
Beam: 48°. Tilt 90° swivel 350°
Size: 75Ø*91H

ALBANY

NS216

IP20 Aluminium
Colour: White, Black

240V 14W 3K or 4K LED
Triac dimmable
Output: 1474 lumen, CRI80
Beam: 52° Tilt 90° swivel 350°
Size: 100Ø*103H

Buttons & Battens

SPRINGFIELD

C330 & C260

IP20 Acrylic shade, aluminium base
Colour: White, Brush aluminium



C330
240V 19W 3K LED
Non dimmable
Size: 330Ø*80D

C260
240V 13W 3K LED
Non dimmable
Size: 260Ø*80D

MATAURI

UL3400 IP54 Aluminium & PC diffuser
Colour: Black



240V 20W 3K LED
Non dimmable:
Size: 240*240*50D

TITOKI

C115D-18W & C116D-25W

IP54 Indoor/ outdoor polycarb
Colour: White




C115D-18W
Double insulated
240V 18W CCT Selectable LED
Triac dimmable
Beam angle: 120°
Output: 1710-1910 lumen, CRI80
Size: 300Ø*40D

C116D-25W
Double insulated
240V 25W CCT Selectable LED
Triac dimmable
Beam angle: 120°
Output: 2300-2575 lumen, CRI80
Size: 350Ø*40D



HIKURANGI

C117-18W IP54 Indoor/ outdoor polycarb
Colour: White

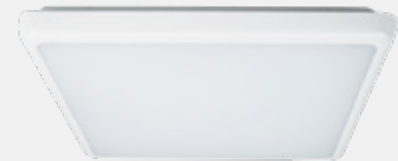

Double insulated
240V 18W CCT Selectable LED
Triac dimmable
Beam angle: 120°
Output: 1800-1995 lumen, CRI80
Size: 300*300W*40D



OMANA

CL87-18W & CL87-25W

IP54 Indoor/ outdoor polycarb
Colour: Black



CL87-18W
Double insulated
240V 18W 3K or 4K LED
Triac dimmable
Output: 1800 lumen, 120°
Size: 275Ø*65D

CL87-25W
Double insulated
240V 25W 3K or 4K or CCT LED
Non dimmable
Output: 2600 lumen, 120°
Size: 350Ø*65D



TIKIPUNGA

C114-12W IP54 Indoor/ outdoor polycarb
Colour: White



Double insulated
240V 12W
Non dimmable
Output: 1100 lumen
Size: 200Ø*35D



WAIKARI

DB08-600, DB08-1200, DB08-1500



IP20 Steel & plastic
Colour: White

DB08-600
240V 20W 4K LED
Beam angle: 120°
Output: 2400 lumen
Size: 625L*59W*59H

DB08-1200
240V 40W 4K LED
Beam angle: 120°
Output: 3860 lumen
Size: 1225L*59W*59H

DB08-1500
240V 45W 4K LED
Beam angle: 120°
Output: 4660 lumen
Size: 1525L*59W*59H

KAEO

DB31-1200, DB31-1500



IP54 Steel & plastic
Colour: White

DB31-1200
240V 40W 4K LED
Beam angle: 120°
Output: 4200 lumen
Size: 1200L*71W*63H

DB31-1500
240V 50W 4K LED
Beam angle: 120°
Output: 5200 lumen
Size: 1500L*71W*63H

TRYPHENA

AL17



IP20 Aluminium & plastic
Colour: White ends, aluminium finish body

240V 42W 3K LED
Non dimmable
Output: 3800 lumens
Size: 1210L*75W*25D
Loose flying lead for
easy positioning

PIPIWAI

DB21



IP20 Steel & plastic
Stylish residential alternative
Colour: White, Black

240V 40W 3K LED
Output: 4200 lumens
Beam: 120°
Size: 1200L*90W

PANGURU

OG-LED-1200 & OG-LED-1500



IP20 Steel & plastic
Colour: White
Beam angle: 150°
Rear and end entry power feed

OG-LED-1200
240V 40W 4K LED
Output: 4200 lumens
Size: 1195L*83W*74H

OG-LED-1500
240V 50W 4K LED
Output: 5300 lumens
Size: 1500L*83W*74H

Residential Spots

HT TRACK SYSTEM - INTEGRATED

RANGIRIRI

SR800D-13W

IP20 Aluminium
Colour: White, Black



240V 13W 3K or 4K LED
Triac dimmable
Output: 1300 lumen, CRI90
Size: 120L*75Ø
Supplied with 50° reflector
Other options: 10,20,30,50°

WAIUKU

SA294C-8W

IP20 Aluminium
Colour: White, Black



240V 8.8W 3K or 4K LED
Non dimmable
Output: 700 lumen
Size: 130L*60Ø
Supplied with 50° reflector
Other options: 10,20,30,50°

TUAKAU

SA294CD-13W

IP20 Aluminium
Colour: White, Black, Silver



240V 13W 3K or 4K or CCT LED
Triac dimmable
Output: 1200 lumen
Size: 145L*60Ø
Supplied with 50° reflector
Other options: 10,20,30,50°

TAPORA

SA215

IP20 Aluminium swivel & tilt
Colour: White, Black



240V 9W 3K LED
Triac dimmable
Output: 945 lumen
Beam angle: 48°
Size: 75Ø*91H

FITZROY

SA294CR-13W

IP20 Aluminium
Colour: White, Black



240V 13W 3K or 4K
Tilt and Swivel, Cut to any length
Rod 100 - 500mm
Size: 145L*60
Output: 1200 lumen

Quality Components


Top quality components producing an exceptional quality of light.

FEATURES


Built in driver & lamps

TRACK ADAPTORS

Supplied with fitted HT adaptor.
Base plates available to order



Also available on
round base plate
R1005
Size: 70Ø*25D



R1003
Size: 100Ø*30D
Colours: White,
Black, Silver,

HT TRACK SYSTEM - GU10

RESIDENTIAL SPOTS

GU10 LED LAMPS

Recommended a good quality branded lamp is used.

Budget lamps are likely to give very poor quality light & fail easily, compromising the installation.

BASE OPTIONS

Spots are supplied with track adaptor
Alternatively order base or recessed plate



Affordable LED spot option
No driver required
Triac dimmable
Attractive flush adaptor design
Neat & tidy - smallish spot
Output ideal for residential
Easy to change lamps

CLARKS BEACH

HSP37

Aluminium
Colour: Black, White



MONOWAI

HSP295

IP20 Aluminium
Colour: White, Black, Silver



RUATORIA

HSP294100


IP20 Aluminium
Colour: White, Black



GISBORNE

HSP294400

IP20 Aluminium
Colour: White, Silver



Rod: 400mm, can be cut to length

PETONE

HSP203

IP20 Aluminium
Colour: Black, Silver



KARAPIRO

HSP2810

IP20 Aluminium
Colour: White, Black, Silver



WAIHI

HSP286

IP20 Aluminium
Colour: White, Black



HAWERA

HSP287

IP20 Aluminium
Colour: Black, Silver



HTC TRACK

Recessed track for HT spot system

Colour: White, Black



240V 16 Amp 1 circuit (3 wire) phase, neutral & earth
End feed & end cap priced separately

Length options: 1m, 2m, 3m or cut to any length

Size: Outer trim 55W*18H, Cutout 40W

TRACK COVER STRIP

Colours: White, Black

Cut to length strips to conceal the gap between fitting.

HT TRACK

Surface track for HT spot system

Colour: White, Black, Silver



240V 16 Amp 1 circuit (3 wire) phase, neutral & earth
Includes end feed & end cap

Length options: 1m, 1.5m, 2m, 3m or cut to any length



Size: 35W*18H

TRACK COVER STRIP


Colours: White, Black

Cut to length strips to conceal the gap between fitting.


Track Components

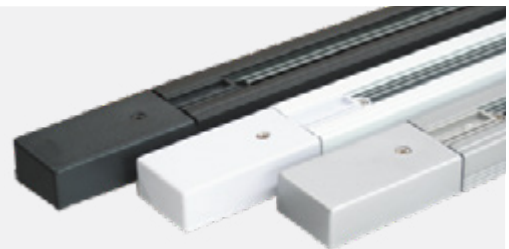



HT- ECAP
HTC-ECAP
End cap




HT- JO1
HTC-JO1
Joiner




HT- LO1
HTC-LO1
Live feed




HT- LO2
Feed joiner




HT-JO2
HTC-JO2
L joiner




HT-JO2
HTC-JO2




HT-JO3
T joiner




HT-JO3(L)
HT-JO3(R)




HT- JO4
Cross joiner




HT- JO5
Flexible bend




HTC-FO1
Recessed fixing
bracket




HT- JO9
Suspension kit



HTC-2.0
HTC-3.0



HT-1.0
HT-1.5
HT-2.0
HT-3.0



SURFACE MOUNTED GU10 SPOTLIGHTS

RESIDENTIAL SPOTS

OKATAINA WS37MBP

IP20 Aluminium
Colour: Black, White



GU10 lamp sold separately
Single on a base
Base: 100*60*28mm

OKAREKA WS37SW

IP20 Aluminium
Colour: White, Black



GU10 lamp sold separately
Base with switch
Base: 100*60*28mm

ROTORUA WS372B

IP20 Aluminium
Colour: White, Black



GU10 lamp sold separately
Base: 300*50*28mm

TARAWERA WS373B

IP20 Aluminium
Colour: Black, White



GU10 lamp sold separately
Base: 480*50*28mm

ROTOITI WS374B

IP20 Aluminium
Colour: Black, White



GU10 lamp sold separately
Base: 540*50*28

GU10 SPOT LIGHTS

Indoor only, excluding bathrooms & similar wet areas

- 240V GU10 LED
- Replaceable GU10 lamps
 - New contemporary European spot
 - Cast aluminium head and base
 - Attractive swivel mechanism
 - Tilt 90° Swivel 270°

GU10 LED LAMPS
Lamps not included - order separately.
Recommend a good quality branded lamp is used. Budget lamps are likely to give very poor quality light & fail easily.

GUG-6W 3K, 4K
240V GU10
Triac dimmable
High output
GE brand GU10 lamp
Quality German brand

IP20 Aluminium




Linear

LINEAR LED PENDANTS OR SURFACE DOWNLIGHTS

A versatile design that effortlessly integrates into any space - residential or commercial

- Exceptional efficiency
- Easy to install
- Offers the perfect balance between ambient and task lighting

CLEVEDON LS2555

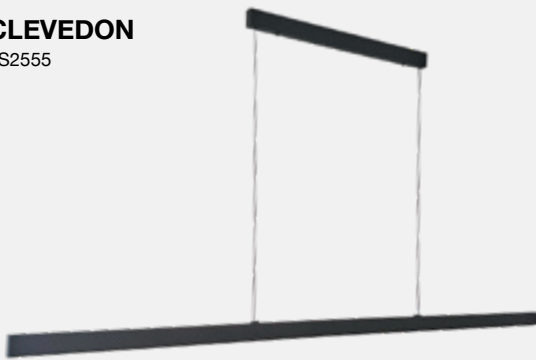


IP20 Aluminium
Color: Black

Suspension: 1.5m adjustable
Power feed integrated with suspension
- no extra cable
Light output up and down
240V, 54W down & and 18W up

4860 lumens down
1620 lumens up
3K LED
Triac dimmable
CRI 82



OPAL DIFFUSER
LS2555P
Size: 2260 x 25 x 55mm H



OPTICAL LENS
LS2555L
Colour black or gold lens
Size: 2080 x 25 x 55mm H

KARETU LS3580




IP20 Aluminium, optical lens linear pendant
Colour: White body & black underface

Quality: Osram (German brand) flicker free driver
Suspensions: 2m adjustable, 3m on request
Beam: 90°

LS3580-1700
240V 30W 3K, Non dimmable
Size: 1700L*35W*80H

LS3580-2250
240V 40W 3K or 4K
Non dimmable
Size: 2250L*35W*80H

WAKEFIELD PDB25-1600

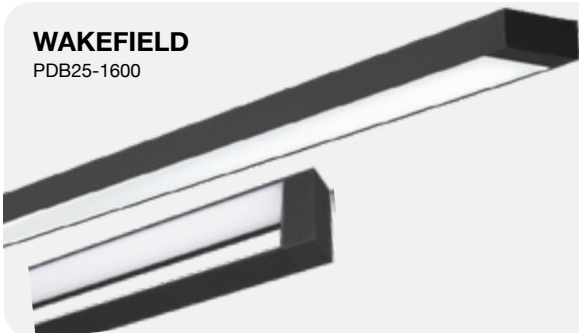

IP20 Aluminium & opal PC diffuser
Colour: Black

Light shines down only
240V 60W 3K or 4K LED
Non dimmable

Output: 4800 lumen, 120° beam
Size: 1620L*115W*50H
Suspensions: 1.5m adjustable

HUNUA

LS5080

Suspended or surface mount with components included.
Linkable using joiner bars.
Triac dimmable

LS5080

Light shines down only
60W, 5400 lumen
240V CCT switch selectable 3K/4K/6K

LS5080-2250UD

Light shines up and down
60W 5400 lumen down, 30W 2700 lumen up
240V 3K or 4K
Size: 2250L*50W*80H
Suspensions: 2m adjustable, 3m on request

LS5080-JB
Straight joiner

LS5080-LJ
Corner joiner

IP20 Aluminium, opal diffuser, aluminium end caps.
Colour: White, Black



JOINING

Channel is prewired 240V either end.
Corners joins have their own integrated drivers and LED's.
Only one power feed required on continuous runs.
Joiner bars provide for a solid connection

MOKOHINAU

TL66 & TL66-UD-1500

TL66 : Light shines down only
TL66-UD-1500 : Light shines up and down
240V 42W LED. 3K or CCT Selectable 3K/4K/6K. Triac dimmable
Output: 4200 lumen, 90° beam
Size: 1504L*56W*75H
Linkable with straight joining & right angle bend
Suspended or surface mount with components included
Suspensions: 1.5m adjustable (or 3m to order)

IP40 Aluminium, opal diffuser, aluminium end caps
Color: White, Black



TL66-J
Straight joiner



TL66-LJ
Right angle joiner

MATAKANA

GZ6588-54W, GZ6588-72W & GZ805A-72W

GZ6588-54W
240V 54W 4K LED non dimmable
Output: 4900 lumen
Size: 1800L*65W*88H.
Drop: 1850L
Colour: Black

GZ6588-72W
IP20 Die aluminium
240V 72W 4K LED non dimmable
Output: 6500 lumen
Size: 2250L*65W*88H.
Drop: 1850L
Colour: Black

GZ805A-72W
240V 72W 4K LED non dimmable
Output: 7200 lumen
Size: 2250L*68W*88H.
Drop: 1850L
Colour: White



Suspended or surface mount
Stand alone or continuous system
Quality components
Osram flicker-free driver

QUALITY

No light leakage when joining channels
Osram German brand driver

SURFACE MOUNT

Involves partial disassembly & drilling of holes through back plate. Instructions included.

IP40 Aluminium, opal diffuser, aluminium end caps



GZ-JB
3 Piece joiner bar set



GZ-LJ
Joiner bends with built-in lamps & driver

Magnetic Track

MT-2M

IP20 Aluminium surface channel

End caps included

Linkable with joiners

24V DC 8A maximum

Size: 2000L*39W*76H - or cut to length

MT-DB

Dimmable 150W driver

MT-J

Straight joiner kit

MT-CS

Plastic cover infill strip

MT-LJ

Right angle bend

MT-EC

End cap

- Aluminium magnetised channel 2m long & linkable
- The spots & blades simply slot in
- The system is powered by a 24V dimmable driver (MT-DB, sold separately) which is supplied in a track box (or can be remotely located)
- Additional fittings can be easily introduced up to the 150W limit of the MT-DB driver

POWER SUPPLIES

Available on request or see web site

More photos & info online at www.prolux.co.nz

MT60

IP20 Aluminium



Protruding diffused blade
24V 13W 3K LED
Dimmable
Output: 620 lumen CRI80
Beam angle: Diffused
Size: 320L*34W*110H

MT66 & MT62

IP20 Aluminium



MT66
Flush optical lens blade
24V 16W 3K LED
Dimmable
Output: 1450 lumen CRI80
Beam angle: 34°
Size: 320L*34W*56H

MT62
Flush diffused blade
24V 13W 3K LED
Dimmable
Output: 620 lumen CRI80
Beam angle: Diffused
Size: 320L*34W*56H

MT72

IP20 Aluminium



MT72
Spotlight
24V 8W 3K LED
Dimmable
Output: 280 lumen CRI-80
Beam angle: 30°
Size: 320L*34W*110H

Channel & Lens

SURFACE CHANNEL

End caps and fixing clips included. **Order LED tape separately**



AP116C

2m Channel & diffuser
Profile size: 18W*8.5H*2000L
Recommended tape:
FS-COB or FS-12V-15W or
FS-24V-15W



AP112C

2m Channel & diffuser
Profile size: 23.5W*10H*2000L
Recommended tape:
FS-COB or FS-12V-15W or
FS-24V-15W



AP110C

2m Channel & diffuser
Profile size: 16W*16H*2000L
Recommended tape:
FS-COB or FS-12V-15W or
FS-24V-15W



AP176C

2m Channel & diffuser
Profile size: 26W*23H*2000L
Recommended tape:
FS-COB or FS-12V-15W or
FS-24V-15W

RECESSED CHANNEL

End caps included. **Order LED tape separately**



AP104C

2m Channel only including
end caps
Profile size: 25W*7H*2000L
Recess width: 17.4W
Recommended tape:
FS-COB or FS-12V-15W or
FS-24V-15W



AP133C

2m Channel only including end caps
Profile size: 30.3W*10H*2000L
Recess width: 23.5W
Recommended tape:
FS-COB or FS-12V-15W or
FS-24V-15W



AP101C

2m Channel only including end caps.
Recessed deeper profile for diffused light
Profile size: 25W*14.5H*2000L
Recess width: 17.4W
Recommended tape: FS-COB or
FS-12V-15W or FS-24V-15W.

SUITABILITY

IP20 Indoors commonly used in cabinet
joinery, cupboards.
Supplied standard with 300mm tails

COMPATIBILITY

Ordering as a kit to ensure compatibility

DRIVERS & LED tape

See pages Power Supplies & LED Tape
Sold Separately

FEED CABLE

Supplied standard with 300mm tails

FACTORY CUTS

Custom length cuts and tails available on
request


FIXING CLIPS




AP116
Fixing clips included



AP110
Fixing clips included




AP112
Fixing clips included




AP176
Fixing clips included

ALP017

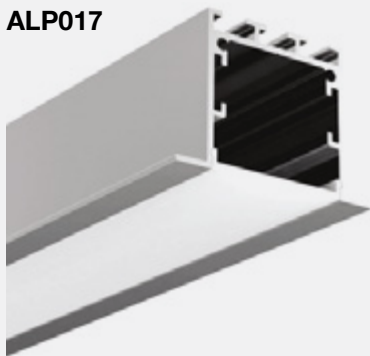

Profile size: 2000L*50W*35D.
Cutout: 35W
Output: 25W 2100 lumen per meter with single strip
Recommended:
 FS-12V-25W or FS-24V-25W double array tape



Recessed aluminium channel with opal matt diffuser
 Colour: White, Black, Anodized silver



LED Tape



ALP017-FC
 Fixing clips



ALP017-EC
 End caps




ALP017-J
 Joiner bars x2


ALP018



Profile size: 2000L*35W*35D
Cutout: 35W
Output: 25W 2100 lumen per meter
Recommended:
 FS-12V-25W or FS-24V-25W double array tape



Aluminium channel with opal matt diffuser
 Colour: White, Black, Anodized silver



LED Tape



ALP018-FC
 Fixing clips




ALP018-EC
 End caps




ALP018-J
 Joiner bars x2

ALP019

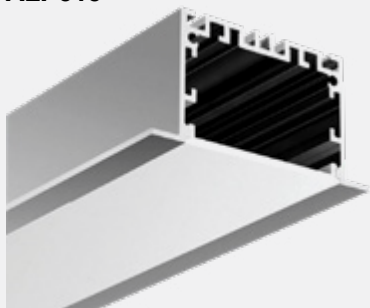

Profile size: 2500L*65W*35D
Cutout: 50W
Output: 25W 2100 lumen per meter with single strip
Recommended:
 FS-12V-25W or FS-24V-25W double array tape



Recessed aluminium channel with opal matt diffuser
 Colour: White, Black, Anodized silver



LED Tape



ALP019-FC
 Fixing clips



ALP019-EC
 End caps



ALP019-J
 Joiner bars x2

ALP020


Profile size: 2500L*50W*35D

Cutout: 50W


Output: 25W 2100 lumen per meter with single strip

Recommended:

FS-12V-25W or FS-24V-25W double array tape



Aluminium channel with opal matt diffuser
Colour: White, Black, Anodized silver



LED Tape

ALP020-FC
Fixing clipsALP020-EC
End capsALP020-J
Joiner bars x2

◀ **FS-12V-4.8W**
Colour temp: 3K, 4K



◀ **FS-12V-9W**
Colour temp: 3K, 4K




◀ **FS-12V-15W**
Colour temp: 3K, 4K, Blue



◀ **FS-24V-15W**
Colour temp: 3K, 4K




◀ **FS-12V-25W**
Colour temp: 3K, 4K



◀ **FS-24V-25W**
Colour temp: 3K, 4K



◀ **FS-COB-24V-10W**
Colour temp: 3K, 4K



◀ **FS-COB-24V-15W**
Colour temp: 3K, 4K
IP65

Constant voltage drivers
- Non dimmable

Q4-12V-6W
Input 240V, Output 12V 6W

Q4-12V-12W
Input 240V, Output 12V 12W

Q4-12V-20W
Input 240V, Output 12V 20W

Q8H-12V-40W
Input 240V, Output 12V 40W

Q8H-12V-50W
Input 240V, Output 12V 50W

Q2-12V-75W
Input 240V, Output 12V 75W

AED-24V-30W
Input 240V, Output 24V 30W

Q3-24V-36W
Input 240V, Output 24V 36W

Q3-24V-50W
Input 240V, Output 24V 50W

Q3-24V-75W
Input 240V, Output 24V 75W

Constant Voltage drivers
- TRIAC dimmable

DIM-24-50W
DIM-12-50W

Size: 184*61*52

V2-100-12T
Input 240V, Output 100W

V2-100-24T
Input 240V, Output 100W

V2-200-24T
Input 240V, Output 200W

See Power Supply page for more options

SUITABILITY

Indoor IP20 tape is not suitable in areas exposed to moisture

VOLTAGE CHOICE

The 24V can run twice the distance & costs the same as 12V

INSTALLATION

Constant voltage must be wired in parallel

ORDERING

Specify feed cable length - standard is 300mm

CODE	INPUT	LED'S PER M	LED TYPE	ROLL LENGTH	CUT WIDTH	MAX RUN	COLOUR TEMP	WATTS PER M	LUMEN PER M	
FS-12V-4.8W	12V	60	3528	5m	5cm	5m	3K or 4K	4.8W	370	
FS-12V-9.6W	12V	60	3528	5m	2.5cm	5m	3K or 4K	9.6W	650	
FS-12V-15W	12V	60	5050	5m	5cm	5m	3K or 4K	15W	1200	
FS-24V-15W	24V	60	5050	10m	10cm	10m	3K or 4K	15W	1200	
FS-12V-25W	12V	120	5050	10m	5cm	5m	3K or 4K	25W	2000	
FS-24V-25W	24V	120	5050	10m	5cm	10m	3K or 4K	25W	2000	
FS-COB-24V-10W	24V	NA	COB	10m	5cm	10m	3K or 4K	10W	1100	
FS-COB-24V-15W	24V	NA	COB	5m	2.5cm	10m	3K or 4K	15W	1500	IP65

COB Constant Voltage LED
3M Brand adhesive backing
40,000 hours life

Indoor Wall Lights

NASEBY

W50 IP20 Aluminium with base switch
Colour: White, Black



Head pivots 180°
240V 4W LED
Non dimmable
CCT: Switchable 3K/4K/6K
Output: 470-550 lumen
Size: 159*69*132D



OMARAMA

W60 IP20 Aluminium
Colour: White, Black



240V 3.4W 3K
Push button dimming
90° tilt 350° swivel
Size: 310*125mm long
Base: 800*38mm deep

PORTLAND

W1800D IP20 Aluminium
Colour: White, Black



Light 50/50 up down
240V 7W 3K LED
Triac dimmable
Size: 180W*80H*90D

PIHA


W1934D IP20 Aluminium
Colour: Silver



240V 8.5W 3K LED
Triac dimmable
Size: 150W*90H*90D

OXFORD

HL531 IP65 Aluminium
Colour: White



Up & down light
240V 6W 3K LED
Non dimmable
Size: 220W*90H*77D

KAREKARE

W1705 IP20 Aluminium
Colour: White, Black



Shines 85% up, 15% down
240V 9.2W 3K LED
Triac dimmable
Output: 942 lumen
Size: 205W*26H*95D

TEKAPO

W70 IP20 Solid brass
Colour/s: Natural brass



240V 3W 3K LED
90° tilt 350° swivel
Non dimmable
Output: 310 lumen
Size: 380*110*85mm
out from wall
Base: 110*50*25mm deep

MANGAWHAI

MB704



IP20 Aluminium
Colours: White, Black

240V 12W 3K or 4K
180 degree tilt
720 lumen
Size: 600*45mm
Base: 125*45mm
Fitting reaches 270mm
maximum out from wall

WAIMATE

W633-12W



IP20 Aluminium
Colours: White, Black



240V 12W
CCT Switchable 3K/4K
Non dimmable
Output: 610 lumen
Size: 600L*140D

**CORONET**

MB537



IP20 Stainless steel

**MB537-8W**


240V 8W 3K or 4K or CCT
Non dimmable
Base: 125W*45H
Size: 452L*125D

MB537-12W

240V 12W CCT LED
Non dimmable
Base: 125W*45H
Size: 570L*125D

THORNDON

MB542-8W

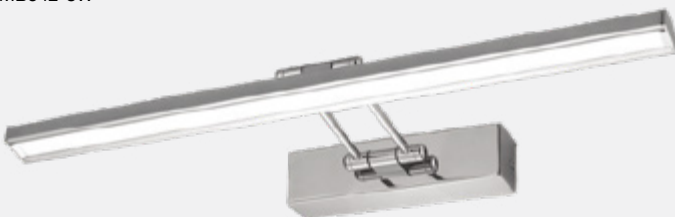

IP20 Steel
Color: Chrome



Swing arm & tilt head
Suitable as picture light
240V 8W 3K or 4K
370 lumen
Non dimmable
Size: 450L*185D
Base: 125W*45H

HERMITAGE

MB113-12W



IP20 Plastic double insulated
Color: Satin chrome

240V 12W 3K or 4K LED
Non dimmable
Size: 700L*60D

NGAROTO

W1933-20, W1933-16

IP20 Aluminium



W1933-20

Colour: White, Black, Silver
240V 20W 3K or 4K LED
Non dimmable

Size: 500L*125D

W1933-16

Colour: White, Black
240V 16W 3K or 4K LED
Non dimmable

Size: 400L*125D

MILTON

W641

IP20 Aluminium
Colour: White, Black



180° light spread
240V 18W LED 3K or 4K
Non dimmable
Size: 600L*95D

ROXBURGH

MB709

IP20 Aluminium
Colour: Black



Tilt 180°
240V 30W LED 3K
Non dimmable
Size: 887mm (L)
Base: 190Ø *75 *35mm (D)

STRATFORD

MB550-12W

IP20 Steel
Colour: Chrome



240V 12W 3K or 4K LED
Non dimmable
Size: 590L*130D

DANNEVIRKE

MB666

IP20, Polycarbonate
Colour: White, Black, Chrome



Double insulated
180 degree tilt head
240V 12W 3K or 4K or 6K
Non Dimmable
Output: 960 lumen
CRI: 80
Size: 634mm long
Base: 142*60*35mm D

Cabinet Recessed

MURIWAI

DL138

IP40 Aluminium
Colour: White



Tilt 20°
240V 3.3W 3K LED
Driver included
Non dimmable
Output: 180 lumen, CRI80
Size: 50Ø*32H
Cutout: 45Ø
Classification: IC-F

WARKWORTH

DG-F03D

IP44 Aluminium & PC diffuser
Colour: White




Swivel 270° & tilt 15°
Ultra thin for 10mm thick joinery
Constant current - series wiring
240V 2.5W 350ma 3K LED
Order driver separately
Dimmable (with appropriate driver)
Output: 200 lumen, CRI80
Size: 70Ø*10d
Cutout: 60Ø
Classification: CA80

WAIWERA

DG-F03

IP44 CNC aluminium & glass
Colour: Silver

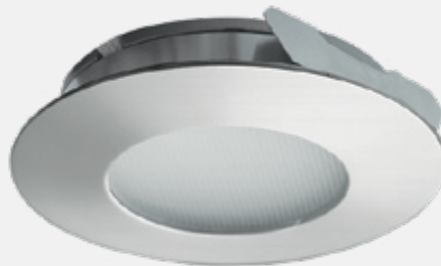

Constant current - series wiring
Ultra thin 10mm for finer joinery
2.5W 350ma 3K LED
Order driver separately
Dimmable (with appropriate driver)
Size: 60Ø*10D
Cutout: 50Ø
Classification: CA80

Stair Lights

All stair lights complete with driver

ROUTE BURN

LDL68


Choice of 6 magnetic interchangeable face plates in glass or aluminium

IP20 Aluminium or Glass
Colour: White, Black


IC-F
500mA 1.5W LED 3K or 4K
Non dimmable
Driver included
CRI: 90
Cutout: 60mm Ø *65mm deep



LDL68SQ




LDL68GSQ




LDL68R



LDL68GR



LDL68R-BK



LDL68SQ-BK

OMAHA

LDL-W01

IP20 CNC aluminium
Colour: White, Black



350mA 1W 3K LED
Driver included
Non dimmable
Size: 50Ø.
Cutout: 43Ø

MANAWATU

LDL1927

IP20 CNC Aluminium
Colour: White, Black, Aluminium



700mA 2.5W 3K LED
Driver included
Non dimmable
Output: 950 lumen
Size: 76W*76W*45D
Cutout: 65*65W

EGMONT

LDL-E01

IP20 Die cast aluminium
Colour: White, Silver



350mA 1.2W 3K LED
Driver included
Non dimmable
Size: 90*90W*37D
Cutout: 75*75W

TONGARIRO

LDL-C01

IP20 Die cast aluminium
Colour: White, Black, Silver



350mA 1.2W constant current 3K or CCT
Driver included
Non dimmable
Size: 90*90W*37D
Cutout: 75*75W





Outdoor

Outdoor

DUNSTAN

DL103A

IP65 on front face
Colour: White, Black



Integrated LED lamp
240V 8W 3K LED
Triac dimmable
Output: 800 lumen
Size: 80Ø*40H
Cutout: 68-75Ø
Classification: IC-F

BENMORE

DL104A

IP65 on front face
Colour: White, Black



Integrated LED lamp
240V 8W 3K LED
Triac dimmable
Beam angle: 60°
Output: 700 lumen
Size: 80W*80W*40H
Cutout: 68-75Ø
Classification: IC-F

WHANGAMATA

DL333

IP54 Aluminium
Colour: White



240V 6W COB LED
CCT selectable 3K, 4K or 6K
Triac dimmable
Tilt: 30°
Output: 450-600 lumen
Beam angle: 60° beam
Size: 95Ø*73mm high
Cutout: 78-85mm Ø
Classification: IC-F, Fire rated for 90 minutes to BS476 standard



HAHEI

SL3301-LED8W-KIT
SL3301-NON-IC

IP44 Recessed
Colour: Stainless 316,
Raw copper



SL3301-NON-IC -Fitting only
SL3301-LED8W-KIT -Includes lamp & driver
Tilt: 20°
Size: 100Ø
Cutout: 82Ø
Classification: CA-90

THAMES

SL3302-LED8W-KIT
SL3302-NON-IC

IP44 Recessed
Colour: Raw copper



SL3302-NON-IC - Fitting only
SL3302-LED8W-KIT - Includes lamp & driver
Tilt: 20°
Size: 100*100W
Cutout: 82Ø
Classification: CA-90

POKENO

PR90

IP54 Recessed
Colour: Stainless 316, Black, White



240V 5W 3K LED
Includes driver & lamp
Size: 100Ø*100H
Cutout: 82Ø
Classification: CA-90

TE AKAU

DL2236

IP54 Aluminium & Glass
Colour: Black



240V 7W 3K LED
Non dimmable
Output: 580 lumen Beam angle: 17°
Size: 90Ø*95H

PUKEKOHE

DL37

IP54 Aluminium & Glass
Colour: White, Black



240V 15W 3K LED
Non dimmable
Output: 1300 lumen, 60 degree
Size: 90Ø*100H

KARAKA

DL38

IP54 Aluminium & Glass
Colour: White, Black



240V 25W 3K or 4K
Non dimmable
Output: 2000 lumen, 60°
Size: 120Ø*110H

MOTU

DL169

IP54 Aluminium & steel
Colour: White, Black



240V 25W LED
CCT Switchable 3K / 4K / 5.7K
Triac dimmable
Output: 2400 lumens, 60°
Size: 120Ø*144H

GLENBROOK

IK1111

IP54 Aluminium
Colour: Black



240V 6W 3K LED
Non dimmable
Tilt: 45°
Size: 90Ø*95L

MATAURI

UL3400

IP54 Aluminium & PC diffuse
Colour: Black



240V 25W 3K LED
Non dimmable
Size: 240*240*50D

OMANA

CL87-18W & CL87-25W

IP54 Indoor/ outdoor polycarb
Colour: Black



CL87-18W
Double insulated
240V 18W 3K, 4K LED
Triac dimmable
Output: 1800 lumen, 120°
Size: 275Ø*65D

CL87-25W
Double insulated
240V 25W 3K or 4K LED Non dimmable
or CCT Switchable 3K/4K/6K Dimmable
Output: 2600 lumen, 120°
Size: 350Ø*65D

HUNTER

HL5602L & HL5602

IP54 Aluminium & PC
Colour: Black



HL5602L
240V 12W LED

HL5602
240V 2*E27
Size: 280Ø*95D

TITOKI

C115D-18W & C116D-25W

IP54 Indoor/ outdoor polycarb
Colour: White



C115D-18W
Double insulated
240V 18W CCT Switchable 3K/4K/6K
Triac dimmable
Output: 1450 lumen
Size: 300Ø*35D



C116D-25W
Double insulated
240V 25W CCT Switchable 3K/4K/6K
Triac dimmable
Output: 1600 lumen
Size: 350Ø*35D



OUTDOOR WALL LIGHTS

Installation

All outdoor wall fixtures need to be sealed from behind with silicone to prevent general deterioration and electronic failure.

Aluminium Suitability

Most die-cast aluminium products are not suitable for harsh coastal conditions - consider alternatives such as plastic, brass and copper.

Copper characteristics

As with other raw copper outdoor products copper will weather and darken over time.

Stainless suitability

316 grade is suitable for all outdoor conditions except extreme seaside conditions where marine grade products may be required.

SUMNER

UL7710

IP54 Aluminium
Colour: White, Black, Graphite



Up down light
240V 6W 3K LED
Output: 300 lumens
Size: 67W*165H*89D

ORETI

UL7715

IP54 Aluminium
Colour: White, Black



Up down light
240V 6W 3K LED
Output: 370 lumens
Size: 110W*110H*95D

HAURAKI

UL7720

IP54 Aluminium
Colour: White, Black, Graphite




Up down light
240V 10W 3K LED
Output: 500 lumens
Size: 140W*140H*110D

DENNISTON

UL4101

IP54 Aluminium
Colour: White, Black



Up down light
240V 8W (2 x 4W) 3K LED
Size: 85W*65H*70D

MURCHISON

UL4102

IP54 Aluminium
Colour: White, Black



Up down light
240V 12W (2 x 6W) 3K LED
Size: 170W*65H*70D

NEWSTEAD

HL2621

IP54 Aluminium
Colour: White, Black



240V 14W (2 x 7W) 3K LED
Size: 62W*143H*82D

ARROWTOWN

UL2701

IP54 Aluminium
Colour: White, Black



Down light only
240V 6W 3K LED
Size: 100W*100H*100D

DALEFIELD

UL2700

IP54 Aluminium
Colour: White, Black



Up down light
240V 12W (2 x 6W) 3K LED
Size: 100W*100H*100D

KINGSTON

HL2691

IP54 Aluminium & PC
Colour: White, Black



240V 5W 3K LED
Size: 120W*130H*60D

ALEXANDRA

HL2221

IP54 Aluminium
Colour: Black



Up down light
240V 6W 3K LED
Output: 430 lumen, 40°
Size: 80*80W*110H*98D
Base: 64W*64W

LUMSDEN

HL2211

IP54 Aluminium
Colour: Black, Silver



Up down light Wall Wash
240V 6W 3K LED
Non dimmable
Output: 430 lumen, 40°
Size: 80Ø*110H*98D
Base: 83Ø

MATAPOURI

VA506

IP44 Surface mount
Colour: Raw copper, Black,
Stainless 316



240V GU10 LED
Size: 140H*70W*45D
Recommended lamp: GUG-6W

HERIOT

HL2891

IP54 Aluminium
Colour: White, Black



Compact size
Up down light
240V 5W 3K LED
Non dimmable
Output: 173 lumen
Size: 82W*82H*56D

OUTDOOR WALL LIGHTS - GU10

CARDRONA

HL7031

IP54

Colour: Stainless 316 grade



Fixed two way light
240V 2 x GU10 LED
Size: 60Ø*165H
Base: 78Ø

MOSSBURN

HL7051

IP54

Colour: Raw copper



Fixed two way light
240V GU10 LED
Size: 60Ø*165H
Base: 78Ø

BALFOUR

HL7033

IP54

Colour: Stainless 316 grade



Directional spot
240V GU10 LED
Size: 60Ø*150H
Base: 78Ø

RIVERSDALE

HL7053

IP54

Colour: Raw copper



Directional spot
240V GU10 LED
Size: 60Ø*150H
Base: 78Ø

DIPTON

HL7032

IP54

Colour: Stainless 316 grade



Fixed one way light - up or down
240V GU10 LED
Size: 60Ø*110H*90D
Base: 78Ø

MANDEVILLE

HL7052

IP54

Colour: Raw copper



Fixed one way light - up or down
240V GU10 LED
Size: 60Ø*110H*90D
Base: 78Ø

WAIKAKA

HL7034

IP54

Colour: Stainless 316 grade



Double directional spot
240V GU10 LED
Size: 60Ø*150H
Base: 110Ø

MATAURA

HL7054

IP54

Colour: Raw copper



Double directional spot
240V GU10 LED
Size: 60Ø*150H
Base: 110Ø

TUAPEKA

HL7070

IP54 Aluminium & glass

Colour: White, Black, Silver



One way light - up or down
240V GU10 LED
Size: 90L*65W
Base: 64*64

BALCLUTHA

HL7071

IP54 Aluminium & glass
Colour: White, Black, Silver



Fixed two way light
240V GU10 LED
Size: 160H*65W*65W
Base: 64*64

CLYDEVALE

HL7355

IP54 Aluminium & glass
Colour: White, Black, Silver



240V GU10 LED
Size: 60Ø*160H
Base: 68Ø

PUKETI

HL7142

IP54 Aluminium & glass
Colour: White, Black, Silver



One way light - up or down
240V GU10 LED
Size: 60Ø*90H
Base: 68Ø

MANAPOURI

HL7354-2B

IP54 Aluminium
Colour: White, Black



240V GU10 LED
Size: 300L*50W*25D
Base: 300L*50W

CLYDE

HL7354-2P

IP54 Aluminium & glass
Colour: White, Black



Swivel & tilt
240V GU10 LED
Base: 100Ø

WINTON

HL7354

IP54 Aluminium
Colour: White, Black



Swivel & tilt
240V GU10 LED
Size: 60Ø*90L*160D
Base: 68Ø

GU10 TO 12V CONVERSION

All of our GU10 wall lights can be converted to 12V on request.

ORDER SEPARATELY


GU10 LAMP

GUR4W



240V 4W 3K
Radium brand
High output
Triac dimmable
Quality German brand

UV stabilized plastic wedge for weatherboard walls



WDG-70mm
Colours: White, Black
Fits: HL7142, 7354, 7355

WDG-78mm
Colours: Black, Brown, Grey
Fits: HL7031, 7032, 7033,
7034, HL7051, 7052, 7053

FAIRLIE

HL5551

IP54 Aluminium & acrylic
Colour: White, Black, Silver240V 12W 3K LED
Size: 264W*135H*90D**GERALDINE**

HL5553

IP54 Aluminium & acrylic
Colour: White, Black, Silver, Cedar brown240V 12W 3K LED
Size: 264W*135H*90D**ARUNDEL**

P60C

IP44 Plastic body, acrylic diffuser
Colour: White, Black, SilverP60C-L 6W LED
240V E27 or 6W LED version
Size: 275W*150H*100D**MAYFIELD**

HL104

IP65 Aluminium & PC diffuser
Colour: BlackBuilt in driver
Non dimmable
240V 15W
CCT Switch Selectable 3K, 4K, 6K
Output: 1390-1650 Lumen
CRI: 80
Fitting Size: 250mm x 150mm x 63mm deep**RUAPUNA**

HL5541L & HL5541

IP54 Aluminium & PC diffuser
Colour: White, Black

Size: 180W*290H*88D

HL5541L
240V 12W 3K LEDHL5541
240V 2"E27**LISMORE**

HL5543L & HL5543

IP54 Aluminium & PC
Colour: White, Silver

Size: 180W*290H*88D

HL5543L
240V 12W 3K LEDHL5543
240V 2"E27**HUNTER**

HL5602L & HL5602

IP54 Aluminium & PC
Colour: Black

Size: 280Ø*95D

HL5602L
240V 12W LEDHL5602
240V 2"E27**WOODBURY**

HL5492L & HL5492

IP54 Aluminium & PC diffuser
Colour: White, Black

Size: 275Ø*86D

HL5492L
240V 12W 3K LEDHL5492
240V 2"E27

LUIGI

KIT1271L & KIT1271

IP54 UV resistant
polycarbonate & glass
Colour: White, Back



Size: 263W*130H*125D

KIT1271L
240V 12W 3K LED

KIT1271
240V E27

MADE IN ITALY

RONALDO

KIT1273L & KIT1273

IP54 UV resistant
polycarbonate & glass
Colour: White, Silver



Size: 263W*130H*125D

KIT1273L
240V 12W 3K LED

KIT1273
240V E27

MADE IN ITALY

CALUZZI

ANIEL-L & ANIEL-E27

IP54 UV resistant
polycarbonate body and diffuser
Colour: White, Black, Silver



Size: 280W*165H*90D

ANIEL-L
240V 6W 3K LED

ANIEL-E27
240V E27

MADE IN ITALY

ROLLESTON

UL6650

IP54 Aluminium
Colour: White, Graphite



Lights shines up and down
240V 9W 3K LED
Non dimmable
Output: 700 lumens
Size: 205W*110D*60H

AHUROA

HL75

IP65 Aluminium
Colour: White, Black



Light shines one way only
10W LED CCT 3K,4K,5.7K Selectable
Non dimmable
Output: 940 lumens
Size: 175*104*30mm

METHVEN

HL2671

IP54 Aluminium
Colour: White, Graphite, Silver




Light shines up & down
A larger fitting also suited to commercial
240V 12W 3K LED non dimmable
Size: 360W*88H*93D

DARFIELD

UL6640

IP54 Aluminium & acrylic
Colour: Graphite



Lights shines up and down
240V 9W 3K LED
Non dimmable
Output: 700 lumens
Size: 205W*110D*60H

OXFORD

HL531

IP54 Aluminium
Colour: White



Lights shines up and down
240V 6W 3K LED
Non dimmable
Size: 220W*90H*77D

RANGIORA

HL532

IP54 Aluminium
Colour: White, Black



Lights shines up and down
240V 12W 3K LED
Non dimmable
Size: 300W*120H*97D. Base: 270W*90H

DUNSANDEL

HL5193

IP54 Die cast
aluminium & glass
Colour: Black, Silver



240V 12W 3K LED
Size: 250W*164H*120D

FLORENCE

POP

IP54 PC & glass diffuser
Colour: White, Silver, Blue



240V E27
Size: 200W*130H*100D
MADE IN ITALY

KLIO

KLIO4927

IP54 Polycarbonate and glass
Colour: Black White, Silver



Integrated lamp & driver
Non dimmable
240V 12W 3K LED
Size: 265W*160H

COACH

EL270UP

IP44 Aluminium
(Coach lantern)
Colour: Black



240V E27
Can be assembled with the head above or
below the base
Size: 350H

CHEVIOT

HL3062

IP54 Aluminium
Colour: White, Black



Built in driver
Non dimmable
240V 7W 3K LED
Output: 200 lumen, indirect reflected
Size: 250H&125W*120D

AMBERLEY

HL4511

IP54 Aluminium
Colour: White, Black



Built in driver
Non dimmable
240V 15W 3K LED
Output: 750 lumen
Size: 250H&150W*115D

HAREWOOD

FL01

IP65 Aluminium and Plastic
Colour: White, Black



Settings for sensitivity time and lux
Integrated lamp and driver
Removable and/or replaceable
sensor
240V 24W LED (2 x 12W)
CCT Switch 3K,4K,5K
Output: 1950-2400 lumens
Beam angle: 100°
CRI: 80
Base: 120mm diameter
Heads: 76mm diameter x 128mm

OUTDOOR LOW LEVEL

TE KUITI

UL9500

IP64

Colour: Black, Graphite, White



Slim surface step light
Alternative to recessed
240V 3W 3K LED
Size: 100W*100H*30D

TAIPA

UL9400

IP64

Colour: Black, White



Slim surface step light
Alternative to recessed
240V 4W 3K LED
Size: 100Ø*30D

AKAROA

UL9600

IP64

Colour: Black, Graphite, White



Slim surface step light
Alternative to recessed
240V 8W 3K LED
Size: 198W*77H*32D

WAIAKE

IL3104

IP64

Colour: Stainless 316, Raw copper




Recessed eyelid step-light
Constant voltage driver on request
12V GU5.3 removable MR16 lamp
Order lamp: GE-MR 4.5W
Face Size: 90Ø
Body Size: 115D*60Ø
Plastic sleeve: 70Ø*130L
(for casting into walls)

MATATA

IL1105EYE

IP65 Aluminium

Colour: Stainless 316,
Raw copper, Black



Recessed eyelid step-light
Constant voltage driver on request
Wire in series
Includes 2m lead
350ma 1W 3K LED
Size: 55Ø*70D
Cutout: 45Ø
(for clipping into timber or dry wall)

KUMARA

HL7472

IP55

Colour: Raw copper, 316 Stainless



Surface mount
12V 1.5W LED
Order lamp separately: DISC-1.5W
Order driver separately
Size: 100Ø*50D

BRETT

HL2471

IP54 Aluminium & glass

Colour: White, Black



Small wall light or step light
240V 2W 3K LED
Size: 80H*75W*63D

OHOKA

UL9700

IP65 Cast Aluminium and glass

Colour: Black



Recessed light
240V 6W LED 3K
Output: 680 lumen
Size: 225W*75H*50D
Cutout for recessed box: 215W*68H

PENCARROW

HL1482

IP54

Colour: Black



Slim surface mount
Alternative to recessed
240V 3K LED
Size: 233W*80H*50D

OUTDOOR DECK LIGHTS

COMPATIBILITY

Use only driver supplied (order separately). Third party drivers may cause flashing and diode failure.

WIRING

In series only - one loop per driver only. Wiring in parallel results in instant failure of all diodes. Wiring with more than one loop results in one loop not working. DO NOT attach fittings to live driver.

DRIVERS

See Power Supplies

Commonly used: MINI350-4W, WP-350-12W, MINI350-12W

TE PUKE

IL1105H-ST

IP65

Colour: Stainless 316



Deck recessed LED
Constant current driver required
Dimmable
350ma 1W 3K LED
Includes 2m lead
Size: 55Ø*70D
Cutout: 40Ø

MAKETU

IL1105H-CO

IP65

Colour: Raw copper



Deck recessed LED
Constant current driver required
Dimmable
350ma 1W 3K LED
Includes 2m lead
Size: 55Ø*70D
Cutout: 40Ø

GREERTON

IL1105H-BK

IP65 Stainless

Colour: Black



Deck recessed LED
Constant current driver required
Dimmable
350ma 1W 3K LED
Includes 2m lead
Size: 55Ø*70D
Cutout: 40Ø

GLEN AFTON

IL1105C-ST

IP65

Colour: Stainless 316



Two way directional
Constant current driver required
Dimmable
350ma 1W 3K LED
Includes 2m lead
Size: 55Ø*70D
Cutout: 40Ø

SPOTSWOOD

IL1105D-ST

IP65

Colour: Stainless 316



Three way directional
Constant current driver required
Dimmable
350ma 1W 3K LED
Includes 2m lead
Size: 55Ø*70D
Cutout: 40Ø


OHOPE

IL1106BR

IL1106ST

IP65

Colour: Raw Brass, Stainless 316



Constant current driver required
350ma 1W 3K LED
Beam angle: 25°
Includes 2m lead
Output: 80 Lumen
Size: 24Ø*35D
Cutout: 17Ø

Outdoor Inground

WIRING

Joins in cable must be IP68 rated

MULTIPLE WIRING -12V

Wire in parallel, use only garden (stranded) cable.

Use a magnetic transformer or suitable long distance electronic driver. The electrician is required to do voltage drop calculation.

POWER SUPPLIES

Order drivers separately - see Drivers section

MOSGIEL

HL7312



IP65 Medium duty inground
Colour: Stainless 316, Raw copper

12V LED GU5.3 (MR16 two pin lamp)
Plastic sleeve & 2m cable included
Lamp suggested: GE-MR4.5W
Trim size: 100Ø, depth 120mm

BELMONT

CL3B-ST & CL3B-BR



IP65 Medium duty inground
Colour: Stainless 316 grade, Solid brass

12V LED GU5.3 (MR16 two pin lamp)
Plastic sleeve & 1.5m cable included
Lamp suggested: GE-MR4.5W
Trim size: 100Ø, depth 110mm
Trim: 6mm

CAMBRIDGE

IL2405



IP67 Medium duty inground
Colour: Stainless 316

12V LED GU5.3 (MR16 two pin lamp)
Plastic sleeve & 2m cable included
30° Lamp tilt
Lamp suggested: GE-MR4.5W
Trim size: 150Ø*115D
Tube size: 140Ø*170D

RAETAHI

IL3108-TWO & IL3108-FOUR



IP65 Medium duty inground
Colour: Stainless 316

12V LED GU5.3 (MR16 two pin lamp)
Plastic sleeve & 2m cable included
Lamp suggested: GE-MR4.5W
Trim: 88Ø*130D
(100mm without sleeve)

Landscape

HUNTLY

HL3104

IP54 Double pole spot
Colour: Raw copper



Including spike
12V LED
Order lamp: GE-MR4.5W
Pole height: 800H
Lead length: 2m

TE PUNA

HL3105

IP54 Double pole spot
Colour: Stainless 316



Including spike
12V LED
Order lamp: GE-MR4.5W
Pole height: 800H
Lead length: 2m

TAMAHERE

HL7354/2.800SP

IP54 Aluminium double spot
Colour: Black



Including spike
12V LED
Order lamp: GE-MR4.5W
Lead length: 2m

MERCER

HL7354.800SP

IP54 Aluminium single spot
Colour: Black, Silver



Including spike
12V LED
Order lamp: GE-MR4.5W
Lead length: 2m

TAKAPUNA

SP607

IP65 Polycarbonate
Colour: Black



12V LED
Order lamp: GEMR-6.5W
Size: 80Ø*110. Spike 270mm

PIRONGIA

CL3BU


IP64
Colour: 316 Stainless steel or
Brass



12V LED
Order lamp: GE-MR4.5W
Lead length: 2m

HL7354-COWL, HL1705-COWL,
HL7055-COWL

IP54 Aluminium single spot
Colour: Black, Stainless, Copper



Anti glare cowl
Simply screws on

WIRING

- Joins have to be fully IP rated
- Use only direct burial garden cable (stranded) of correct rating

MULTIPLE WIRING - 12V

- Wire in parallel using driver suitable for long distance
- Electrician is required to do voltage drop calculation

SUGGESTED MR16 LAMP

GE-MR4.5W for excellent light & reliability

STAINLESS SUITABILITY

316 grade is suitable for all outdoor conditions

ALUMINIUM SUITABILITY

Most die-cast aluminium products are not suitable for harsh coastal conditions, consider alternatives such as stainless, plastic, brass, copper

COPPER CHARACTERISTICS

As with other raw copper outdoor products the copper will darken over time

ANAKIWA

HL7055-SP

IP54

Colour: Raw copper



12V LED

Order lamp: GE-MR4.5W


Lead length: 2m

HANMER

HL7056-SP

IP54

Colour: Raw copper



12V LED

Order lamp: GE-MR4.5W

Lead length: 2m

LUGGATE

HL1705-SP

IP64

Colour: 316 Stainless steel



12V LED

Order lamp: GE-MR4.5W

Lead length: 2m

MOUTERE

HL1706-SP

IP54

Colour: 316 Stainless steel



12V LED

Order lamp: GE-MR4.5W

Lead length: 2m

TAKAKA

HL7354SP

IP54 Aluminium

Colour: Black



12V LED

Order lamp: GE-MR4.5W

Lead length: 2m

GRANITY

HL7356SP

IP54 Aluminium

Colour: Black



12V LED

Order lamp: GE-MR4.5W

Lead length: 2m

**OTIRA**

HL7162-ST

IP64 Stainless
Colour: Stainless steel



12V LED

Order lamp: GE-MR4.5W

Lead length: 2m

HOKITIKA

CL3BU-SP

IP64 Stainless
Colour: 316 Stainless steel



12V LED

Order lamp: GE-MR4.5W

Lead length: 2m

DRIVERS

V6- 40W -12V Size: 176*58*31

V6-100W-12V Size: 186*64*39

V6-150W-12V Size: 191*70*40

V6-200W-12V Size: 191*70*40

IP67 Constant Voltage drivers

Input: 240V

Output: 12V

Protection: Open circuit, short circuit, overload, over heating

Bollards & Pathlights

SUITABILITY

General outdoor, excluding seaside

OPTIONS - 12V or 240V

Newer buildings have RCD systems which are very sensitive to moisture. The 12V bollards eliminate this issue, but require common wiring using a remote power supply.

INSTALLATION

Careful & well planned installation is essential. Ensure all joins are fully IP68 waterproof. Bollards should not be buried in the ground or have soil packed around the base. Resultant problems include condensation inside the bollard & paint issues. Ideally install on a plinth above ground.

Avoid very wet areas.

LAMP CHOICE

Use quality lamps for non-integrated fittings to avoid regular replacement

KAIPARA

BL1600.600 & BL1600.1000



Integrated driver & lamp
360° beam
240V 24W 3K LED
Output: 2100 lumen
Size: 600H*160Ø
Size: 955H*160Ø


BL1600-SHIELD
Clip in shield to create
180° beam
Colour: Black



IP65 Die cast aluminium & PC diffuser
Colour: Black

DRURY

BL1700

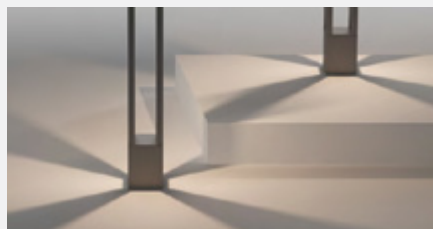

Integrated driver & lamp
Light output is down only
240V 22W 3K LED
Output: 1900 lumen
Size: 900H*160W*160W



IP65 Die cast aluminium
Colour: Black

SILVERDALE

HL7058.650-L, HL7058.900-L
HL7058.650-12V, HL7058.900-12V

Option 1:
HL7058.650-L, HL7058.900-L
Lamp included: GE-Brightstik-6W or 10W,
3K or 4K
240V E27 lampholder
Size: 650H or 900H*90Ø
Base: 143Ø

Option 2:
HL7058.650-12V, HL7058.900-12V
12V G6.35 lampholder
Remote driver required
Replaceable LED lamp included
CORN-G6.35-4W
Size: 650H or 900H*90Ø
Base: 143Ø



IP44 Die cast aluminium
Colour: Black, Graphite

HOKIANGA

HL8403.600-L, HL8403.900-L
HL8403.600-12V, HL8403.900-12V


Light output is down only

Option 1:

240V E27 lampholder
Lamp included: GE-Brightstik-10W 3K or 4K
Size: 600H or 900H*110Ø
Base: 170Ø

Option 2:

12V GU5.3 lampholder
Remote driver required
Replaceable LED lamp included
GE-MR6.5W (GE brand)
Size: 600H or 900H*110Ø
Base: 170Ø

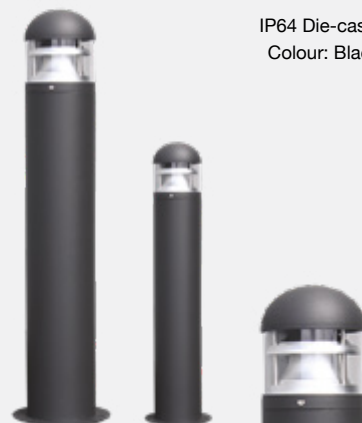

IP64 Die-cast aluminium
Colour: Black, Graphite

MANLY

HK2836-650

IP54 Die-cast aluminium
Colour: Black, Graphite

Built in driver
Option: converted to 12V on request
240V 9W LED
Output: 330 lumen
Beam: 106°
Size: 650H*143W*40
Base: 125w 65d

**WAIPU**

HK1374

IP54 Aluminium
Colour: Black, Graphite

Integrated driver & lamp
Light output is down only
240V 10W 3K LED
Option: Can be converted to 12V on request
Output: 330 lumen
Beam: 60°
Size: 600H*120W*80

**KERIKERI**

HL1102

12V AC
Replaceable G4 lamp (included)
Remote transformer required
Lead length 2m
Size: 500mm High, Shade 160mm dia,
plastic spike 210mm long



IP54 Aluminium
Colour: Natural brass, plastic spike

12V POWER SUPPLIES

IP67 Constant Voltage drivers

Input: 240V Output: 12V

Protection: Open circuit, short circuit,
overload, over heating

V6- 40W -12V Size: 176*58*31

V6-100W-12V Size: 186*64*39

V6-150W-12V Size: 191*70*40

V6-200W-12V Size: 191*70*40

V2-100-12T Size: 191*70*40

Q2-12V-75W





Commercial

Commercial Downlights

SUITABILITY

Commercial indoors

COMPATIBILITY

Use only drivers supplied to ensure compatibility

PHOTOMETRIC DATA

Available on request

MAHIA

RD07B-32W

IP20 Aluminium & steel
Colour: White, Black



240V 32W SMD LED
CCT Switchable 3K,4K,6K
65° Tilt
Non dimmable
Output: 3800 lumen, 90° Beam
Size: 235*145W*118H
Cutout: 220*130W
Classification: IC-F SCB 50mm, HCB 50mm



RAWENE

DL179

IP44 Aluminium
VD chrome reflector
Colour: White, Black



240V 25W 4K LED
Non dimmable
Output: 2600 lumen
Beam Angle: 80°
Size: 228Ø*99H
Cutout: 205Ø
Classification: IC-F SCB 50mm HCB 50mm

WAITOKI

DL316

IP20 Aluminium
Colour: White, Black, Chrome



240V 25W LED
CCT Switchable 3K,4K,6K
80° tilt
Non dimmable
Output: 1950 lumen
Beam Angle: 90° beam
Size: 175Ø*120D.
Cutout: 160Ø
Classification: CA-80, SCB 50mm



MOTU

DL169

IP54 Aluminium & steel
Colour: White, Black



240V 25W LED
CCT Switchable 3K,4K,6K
Non dimmable
Output: 2400 lumens,
Beam Angle: 60°
Size: 120Ø*144H



RUATOKI

DL34

IP44 Aluminium
Colour: White



240V 25W LED
CCT Switchable 3K,4K,6K
Triac Dimmable
Output: 2100 lumen
Beam Angle: 90°
Size: 190L*190W*55D.
Cutout: 160L*160W
Classification: IC-F



MOHAKA

DL285

IP54 Recessed
Colour: Stainless 316, Black, White



240V 25W LED 3K or 4K
Triac dimmable
Output: 2150-2750 lumen, 60°
CRI: 80
Size: 172Ø*95H
Cutout: 150-165Ø
Classification: IC-F

HAWEA

DL362

IP44 Aluminium
Colour: White



Low glare design
240V 30W LED 3K or 4K
Triac dimmable
Output: 3650 lumen 36°
CRI: 90 UGR<19
Size: 240Ø*142H
Cut out: 195-225Ø
Classification: IC-F

INVERCARGILL

DL363

IP44 Aluminium
Colour: White



Low glare design
240V 30W LED 3K or 4K
Triac dimmable
Output: 3650 lumen 36°
CRI: 90 UGR<19
Size: 190Ø*120H
Cut out: 160-170Ø
Classification: IC-F

TOKOMARU

DL404

IP44 Aluminium
Colour: White, Black



240V 25W LED
CCT Switchable 3K,4K,6K
Triac dimmable
Output: 2100 lumen 90° beam
Size: 190Ø*55D.
Cutout: 165Ø
Classification: IC-F SCB 50mm HCB 50mm

TURANGI

DL416

IP44 Aluminium
Colour: White



240V 25W 3K or 4K LED
Non dimmable
Output: 2300 lumen 90° beam
Size: 228Ø*55H.
Cutout: 205Ø
Classification: IC-F SCB 50mm HCB 50mm

TIRI

DL418

IP44 Aluminium
Colour: White



240V 35W LED
CCT Switchable 3K,4K,6K
Triac dimmable
Output: 3200 lumen 90 degree beam
Size: 228Ø*55H
Cutout: 205Ø
Classification: IC-F SCB 50mm HCB 50mm

AOTEA

DL419

IP20 Aluminium
Colour: White



240V 35W LED
CCT Switchable 3K,4K,6K
Non dimmable
Output: 3300 lumen 90 degree beam
Size: 280Ø*52D
Cutout: 230-260Ø
Classification: IC-F SCB 50mm HCB 50mm

ARAWA

UCL67

IP20 Aluminium & steel
Colour: White



240V 30W 4K LED
30° tilt
Non dimmable
Output: 2910 lumen 60° beam
Size: 175*175W*135H
Cutout: 160*160W
Classification: CA90 SCB 50mm HCB 50mm

RAKINO

DL229

IP40 Aluminium & clear PC diffuser
Colour: White



240V 25W 3K or 4K LED
Non dimmable
Output: 2700 lumen 60 degree
Size: 145Ø*80H
Cutout: 120Ø
Classification: IC-F

PONU

DL5022

IP20 Aluminium & PC diffuser
Colour: White



240V 25W LED
CCT Switchable 3K,4K,6K
Non dimmable
Output: 2200 lumen 60° beam
Size: 190Ø*80D
Cutout: 165Ø
Classification: IC-F SCB 50mm HCB 50mm

Commercial Track Spotlights

WAITEMATA

SA8530

IP20 Die cast aluminium
Colour: Black



240V 26W LED 3K or 4K
Non dimmable
CRI:90
Output: 3400 lumen, 40°
Reflector options: 20, 40, 70°
Head size: 95Ø

CHATHAM

HW1206B

IP20 Die cast aluminium
Colour: White, Black



240V 30W LED 3K,4K,6K switchable
Dimmable
CRI: 90
Output: 2400 lumen, 36 degree
Reflector options: 24, 36, 50 degree
Head size: 103Ø

OBAN

HW5800

IP20 Die cast aluminium
Colour: White, Black



240V 35W LED 3K or 4K
Dimmable
CRI: 90
Output: 3600 lumens
Reflector: 36 degree
Head size: 100Ø*260L

BLLENHEIM

HW119

IP20 Aluminium
Colour: White, Black



240V 25W 3K,4K,5K switchable
Dimmable
Output: 1950 - 2450 lumen
CRI: 90
Reflector: 38°
Size: 68Ø*175mm

FLAGSTAFF

HW56

IP20 Die cast aluminium
Colour: White, Black



240V 30W LED 3K,4K,5K switchable
Non dimmable
Output: 3000 lumens
CRI: 90
Beam Angle: 36°
Zoom adjustment: 15-60°
Head size: 100Ø

KAPITI

HW1331

Colour: White



240V 25W LED 3K or 4K
CRI:90
Dimmable or Non dimmable
Output: 2100 lumens, 36°
Reflector options: 24, 36, 50°
Head size: 90Ø

MATANGI

HW128

IP20 Aluminium
Colour: White, Black



Wide Angle Flood
240V 30W 3K,4K or 6K
Non dimmable
Output: 2400 lumen
CRI: 90
Beam angle: 60°
Fitting size: 115*135mm H
Gearbox: 165*82*45mm

KARORI

HW1440

IP20 Die cast aluminium
Colour: White, Black



240V 30W LED 3K,4K,6K or CCT switchable
Dimmable or Non dimmable
CRI: 90
Output: 2400 lumens, 36°
Reflector options: 24, 36, 50°
Head size: 90Ø

PAKIRI

HW1205E

IP20 Die cast aluminium
Colour: White, Silver



240V 30W LED 3K or 4K
Non dimmable
CRI: 90
Output: 2400 lumens, 36 degree
Reflector options: 16, 24, 36, 50 degree
Head size: 103Ø

TRAX SYSTEM

APPLICATION

Retail, Supermarkets, Offices, Art gallery

FEATURES

- Makes for an eye catching installation
- Flexible & adaptable using standard commercial track
- Easily maintained or upgraded (clip in)
- Spots can be added to the track
- Quality product with branded components

QUALITY

Osram German brand driver for top quality & performance

TRACK APPLICATION

- Fitted with HW-4 commercial 3 Circuit track adaptor
- Track can be suspension hung, or fixed to ceiling

AVAILABILITY

Stock item

RUSSELL

AM02-36W

IP20 Aluminium
Colour: White, Black



240V 36W 4K LED
Adjustable 60° tilt
Output: 4680 lumen.
Beam: 90°
Size: 370*60*108

TAIRUA

AM02-54W

IP20 Aluminium
Colour: White, Black



240V 54W 4K LED
Adjustable 60° tilt
Output: 7020 lumen
Beam: 90°
Size: 510*60*108

WAITANGI

AM04-60W

IP20 Aluminium
Colour: White




240V 60W 4K LED
Output: 7200 lumen
Beam: 120 degrees
Size: 1150*80*98

OPUA

AM03-40W & AM03-30-60W

IP20 Aluminium
Colour: White, Black

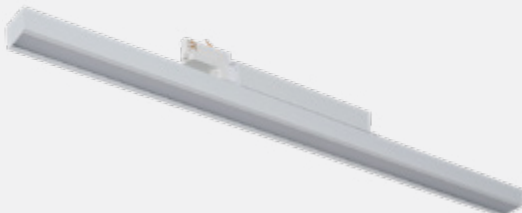

AM03-40W
IP20 Aluminium
Colours: White
240V 40W 4K LED
Output: 5600 lumen
Beam angle: 90 degrees
Size: 1150*60*98




AM03-30-60W
IP20 Aluminium, opal diffuser
240V output wattage selectable by
dipswitch 30W/40W/50W/60W
CCT switch selectable 3K or 4K
Output: 8400 lumen
Beam angle: 90 degrees
Size: 1150*60*108 H



TRACK

HW4



HW4-2.0
HW4-3.0

Colour: White, Black

240V 16 Amp, 3 circuit

Surface mount or suspended commercial track
Three live conductors

End feed & end cap priced separately

Length options: 2m, 3m. Cut to any length

Size: 30W*35H


Clip in track cover available (HW4COVER)

Polarity


Before ordering consider the polarity of the track layout so as to order the correct joiner components.

TRACK COMPONENTS


HW4



HW4-ECAP
End cap



HW4-JO1
Joiner




HW4-LO1
Live feed




HW4-L01-L



HT4-L01-R



HW4-L02
Feed joiner




HW4-JO2
L joiner



HW4-JO2-O




HW4-JO2-I



HW4-JO3
T joiner




HW4-JO3




HW4-JO4
Cross joiner




HW1205E-R
Rod spot 500mm
White



HW4-JO5
Flexible bend



HW4-JO6
Rod suspension



HW4-JO9
Suspension kit



HW-BP
Clip in base plate for
track spots
Size: 100Ø
White, Black

PORONUI

NS208-25W

IP20 Cast aluminium
Colour: White, Black



Surface mount, swivel & tilt
240V 25W 3K or 4K or CCT Switchable LED
Triac dimmable
Output: 2350-2570 lumen
Beam angle: 36°
Head size: 85Ø*211L



Surface mount,
swivel & tilt.

PUHOI

NS207-15W

IP20 Cast aluminium
Colour: White, Black



Surface mount, swivel & tilt
240V 15W 3K or 4K or CCT Switchable LED
Triac dimmable
Output: 1230-1420 lumen
Beam angle: 36°
Head size: 85Ø*186L

Commercial Pendants

JOHNSONVILLE

HBS-NB

IP54 Aluminium & steel
Colour: Black



240V 3030 LED 50W, 3K, 4K, 6K

Dimmable: 1-10V

Output: 6000 lumen, medium 45° beam

Quality: Meanwell XLG-50 brand driver

Reflector: 60 degree narrow beam or 90 degree wide beam

Size: 40*40*59cm

Dropper: 1.5m

PORIRUA

HBS-WB

IP54 Aluminium & steel
Colour: Black



240V 3030 LED 50W, 3K, 4K, 6K

Dimmable: 1-10V

Output: 6000 lumen, medium 45° beam

Quality: Meanwell XLG-50 brand driver

Reflector: 60 degree narrow beam or 90 degree wide beam

Size: 40*40*59cm

Dropper: 1.5m

TAWA

HBS-PD

IP54 Aluminium & steel
Colour: Black



240V 3030 LED 50W, 3K, 4K, 6K

Dimmable: 1-10V

Output: 6000 lumen, medium 45° beam

Quality: Meanwell XLG-50 brand driver

Reflector: 60 degree narrow beam or 90 degree wide beam

Size: 40*40*59cm

Dropper: 1.5m

RUAKURA

PR19

IP20 Aluminium &
prismatic diffuser



Lampholder 240V E27 porcelain

Size: 420Ø*500H.

Base: 120Ø

Overall drop: 2.0m

TAIERI

GKL-100W

IP20 Aluminium & steel
Colour: Black



240V 100W 4K LED

Non dimmable

Output: 3400 lumen, 90° beam

DIP switch on driver to reduce output

Quality: Meanwell driver

Size: 350Ø

Dropper: 2m chain

PUPUKE

PL5012

IP20 Aluminium
Colour: White Trim



240V 35W 4K LED

triac dimmable

Output: 2750 lumen, 120° beam

Size: 500Ø.

Overall drop: 1.2m

Quality: Philips driver



RICHMOND

UHB200

IP54 Aluminium & steel



90° beam

Selectable 100-200W

CCT selectable 4K, 5K, 5.7K

Size: 345Ø120mm high

Includes 1.5m lead and plug and 30cm chain and hooks



MAPUA

UHB200-PD

IP54 Aluminium & steel



UHB200 with Prismatic diffuser

Selectable 100-200W

CCT selectable 4K, 5K, 5.7K

Size: 345Ø120mm high

Includes 1.5m lead and plug and prismatic diffuser, plus 30cm chain



MOTUEKA

UHB200-SHADE

IP54 Aluminium & Steel



90° beam

Selectable 100-200W

CCT selectable 4K, 5K, 5.7K

Size: 345Ø120mm high

Includes 1.5m lead and plug and aluminium shade, plus 30cm chain



Trunking System



TRUNKING SYSTEM

SL60LT & SL60ST

Modern efficient & effective commercial lighting

- Low installation costs
- Adjustable output range

Colour: Black

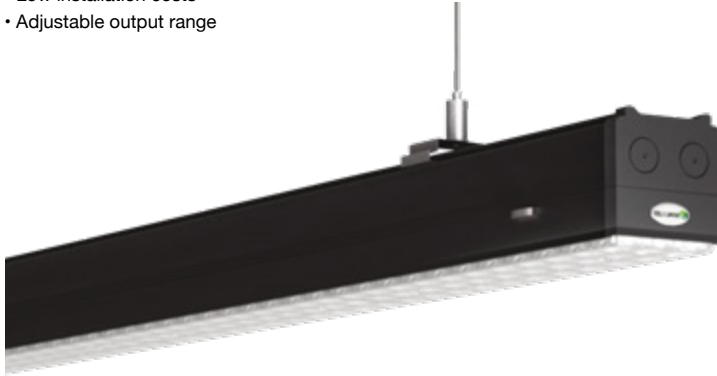

AVAILABILITY

All ex stock

COMPONENTS

See online: Joiners, suspensions, photos, instruction etc

QUALITY

Osram German brand driver for top quality & performance

PHOTOMETRICS

IES data available on request

SL60LT

Linkable trunking option for continuous runs

Three phase internal wiring for independent switching

Order end caps, power feed, flex tube, & suspensions separately

Order one power feed plug per run

SL60ST

Single stand alone unit

Supplied complete with power cable & end caps

Order suspension kits & flexible tube separately

Colour temperature: 4K

Output: four options adjustable with DIP switch on driver

240V 36W 5000 lumen

240V 44W 6110 lumen

240V 52W 7220 lumen

240V 60W 8340 lumen

Beam: Optic lens light distribution 90° Wide

Size: 1437L*70H*65W



Lamps & Drivers

12V MR16



GE Brand
Non dimmable
GE-MR-4.5W 3K
GE-MR-6.1W 3K, 4K

240V GU10



GE Brand
Non dimmable
GUR-4W 3K, 4K
Dimmable
GUG-6W 3K, 4K

GE-BRIGHTSTIK



GE-BRIGHTSTIK-6W
240V 6W 3K or 4K
GE-BRIGHTSTIK-10W
240V 10W 3K or 4K
General purpose LED - GE brand
E27 Non dimmable
Output: 810 lumen
Beam: 240 degrees
Life: 15000 hours
Size: 37Ø*115L incl thread

G4

G4-1W 3K



12V G4 Non dimmable
G4-1W 3K
Size: 9Ø*25L excl pins
Use specified CV driver


G9



G9-2.5W 3K
240V G9 Non dimmable
G9-2.5W 3K
Size: 18Ø*38L excl pins
No driver required
G9-4W 3K
240V G9 Non dimmable
G9-4W 3K
Size: 24Ø*55L excl pins
No driver required

MODULE KIT FOR DOWNLIGHTS

MOD5-8WKIT

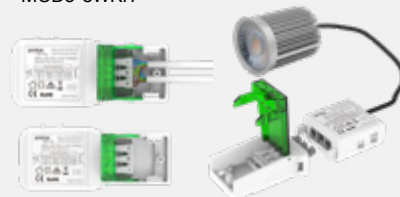

Output: Switchable 5W-8W output
CCT switch 3K, 4K, 6K
Quick connect driver with looping terminals

Classification: IC-F
Abut & cover.
Can install under insulation.
Distance to timber building elements 25mm



DISC R (REAR PIN OPTION)



12V G4
Non dimmable
Use specified driver
Voltage 10V-35V
DISC 1.5W, 3K, 4K
Suitable for modern boats
Size: 30Ø

DISC

G9-2.5W 3K



12V G4 Non dimmable
DISC-1.5W 3K, 4K
Use specified driver
Voltage 10V-35V
Suitable for modern boats
Size: 30Ø

CORN-G4

12V G4



12V G4 Non dimmable
CORN-3.5W 3K
CORN-2W 3K, 4K
Use specified CV driver
Size: 12Ø*32L excl pins

CORN-G6.35

12V MR16



12V G6.35 Non dimmable
G6.35-4W 3K
Size: 18Ø*35L excl pins
Use specified CV driver

CONSTANT CURRENT DRIVERS

LAMPS & DRIVERS

MINI-350MA-4W



IP65 Constant current
Non dimmable
Input: 100-240V
Max output: 1-4W
Output current: 350ma
Output voltage: 2-12V
Size: 38L*27W*21H

LMVC8AI-UNI



Constant current
Non dimmable
Input: 100V-240V
Max output: 1-9W
Output current: 350mA
Output voltage: 3-26VDC
Size: 85L*40W*23H

MINI-350MA-12W



IP65 Constant current
Non dimmable
Input: 100-240V
Max output: 5-12W
Output current: 350ma
Output voltage: 12-35V
Size: 50L*48W*24H

LSC20W350P-UNI



IP20
Constant current
Non dimmable
Input: 100-277V
Max output: 11-19.3W
Output current: 350ma
Output voltage: 32-55Vdc
Size: 42W*52W*15H

DIM500MA/12W



Constant current
Dimmable with trailing
edge dimmer
Input: 220-240V
Max output: 6-12W
Output current: 500ma
Output voltage: 12-24V
Size: 100L*40W*23H

Q4-12W-CC



Constant current
Dimmable
Input: 200V-240V
Max output: 6-12W
Output current: 330mA
Output voltage: 20-40VDC
Size: 125L*45W*30H

LLVC12A-UNI



Constant current
Non dimmable
Input: 100V-240V
Max output: 6-12W
Output current: 350mA
Output voltage: 18-36VDC
Size: 170L*40W*30H

WP-350MA-12W



IP68 Constant current
Non dimmable
Input: 220-240V
Max output: 1-12W
Output current: 350ma
Output voltage: 2-35V
Size: 188L*76W*38H

Q4-350MA-20W



Constant current
Non dimmable
Input: 240V
Max output: 1-20W
Output current: 350ma
Output voltage: 2-58V
Size: 113L*44W*28H

Q8H-500MA-40W



Constant current
Non dimmable
Input: 240V
Max output: 13-40W
Output current: 500ma
Output voltage: 27-80V
Size: 142L*50W*25H

CONSTANT VOLTAGE DRIVERS

MINI-12V-4W, MINI-12V-12W



IP65 Constant voltage

Non dimmable

MINI-12V-4W

Input: 100-240V

Output: 12V

Min 1W max 4W

Size: 38L*27W*21H

MINI-12V-12W

Input: 220-240V

Output: 12V

Min 1W max 12W

Size: 50L*48W*24H

DIM12-50



DIM12-50

Constant voltage

Dimmable

Input: 240V

Output: 12V

12-50W maximum

Size: 184*61*32

Q4-12V

Constant voltage
Non dimmable



Q4-12V-6W

Input 240V,

Output: 12V 6W

Size: 81L*39W*22D

Q4-12V-12W

Input 240V,

Output: 12V 12W

Size: 98L*39W*22D

Q4-12V-20W

Input 240V,

Output: 12V 20W

Size: 113L*44W*28

V2

IP67 Constant voltage
Dimmable drivers



V2-100-12T

Size: 165*70*40

Output: 12V,
36W-100W Max

V2-100-24T

Size: 165*70*40

Output: 24V,
36W-100W Max

V2-200-24T

Size: 225*70*40

Output: 24V,
70-200W Max

V6

IP67 Constant voltage
Non dimmable
Input: 100-240V



V6-40W-12V

Size: 176*58*31

V6-100W-12V

Size: 186*64*39

V6-150W-12V

Size: 191*70*40

V6-200-12V

Size: 191*70*40

DIM24-50

DIM24-50
Constant voltage
Dimmable
Input: 240V
Output: 24V
12-50W maximum
Size: 184*61*32



Q2

Constant voltage
Non dimmable



Q2-12V-75W (IP67)

Input: 240V

Output: 24V 36W

Size: 185L*63W*40D

Q3

Constant voltage
Non dimmable



Q3-24V-36W

Input: 240V

Output: 24V 36W

Size: 140L*50W*35D

Q3-24V-50W

Input: 240V

Output: 24V 50W

Size: 182L*60W*32D

Q3-24V-75W

Input: 240V,

Output: 24V 75W

Size: 182L*60W*32D

Q8H

Constant voltage
Non dimmable



Q8H-12V-40W

Input: 240V

Output: 12V 40W

Size: 166L*52W*24D

Q8H-12V-50W

Input: 240V

Output: 12V 50W

Size: 184L*61W*32D

Index

INDEX BY CODE

AL17	PG 13	DL418	PG 49
AM02-36W	PG 51	DL419	PG 49
AM02-54W	PG 51	DL43	PG4
AM03-40W	PG 51	DL5022	PG 49
AM04-60W	PG 51	DL54	PG 8
ANIEL	PG 37	DL55	PG 8
BL1600.600 -1000	PG 45	DL56	PG 8
BL1700	PG 45	DL593	PG 5
C114	PG 12	DL7001	PG 7
C115 & C116D	PG 12/31	DL7002	PG 7
C117	PG 12	DL71	PG 6
C330& C260	PG 12	DL77	PG 5
CL104B	PG 5	EL270UP	PG 38
CL350	PG 5	FL01	PG 38
CL3B	PG 41	GKL-100W	PG 53
CL3BU	PG 42	GZ6588/GZ805A	PG 19
CL3BU-SP	PG 44	HBS-NB	PG 53
CL76	PG4	HBS-PD	PG 53
CL78	PG 4	HBS-WB	PG 53
CL87	PG 12/31	HK1374	PG 46
DA921S	PG 6	HK2836	PG 46
DB08-600- 1200-1500	PG 13	HL104	PG 36
DB21	PG 13	HL1102	PG 46
DB31- 1200, 1500	PG 13	HL1482	PG 39
DG-F03	PG 27	HL1705	PG 43
DGF03D	PG 27	HL1706	PG 43
DL103A	PG 5/30	HL2211	PG 33
DL104A	PG 5/30	HL2221	PG 33
DL138	PG 5/27	HL2471	PG 39
DL169	PG 31/48	HL2621	PG 32
DL17	PG 4	HL2671	PG 37
DL179	PG 48	HL2691	PG 33
DL201	PG 6	HL2891	PG 33
DL202	PG 6	HL3062	PG 38
DL22	PG 4	HL3104	PG 42
DL222	PG 8	HL3105	PG 42
DL2236	PG 30	HL4511	PG 38
DL229	PG 49	HL5193	PG 38
DL24	PG 4	HL531	PG 24/37
DL260	PG 6	HL532	PG 37
DL262	PG 7	HL5492	PG 36
DL264	PG 7	HL5541	PG 36
DL284	PG 6	HL5543	PG 36
DL285	PG 48	HL5551	PG 36
DL30	PG 9	HL5553	PG 36
DL301	PG 6	HL5602L	PG 31/36
DL302	PG 6	HL5602L	PG 33
DL316	PG 48	HL7031	PG 34
DL333	PG 5/30	HL7032	PG 34
DL34	PG 48	HL7033	PG 34
DL350	PG 5	HL7034	PG 34
DL361	PG 6	HL7051	PG 34
DL362	PG 49	HL7052	PG 34
DL363	PG 49	HL7053	PG 34
DL37	PG 30	HL7054	PG 34
DL38	PG 31	HL7055	PG 43
DL401	PG 8	HL7056	PG 43
DL402	PG 8	HL7058.650 -900	PG 45
DL403	PG 8	HL7070	PG 34
DL404	PG 49	HL7071	PG 35
DL407	PG 8	HL7142	PG 35
DL408	PG 8	HL7162	PG 44
DL416	PG 49	HL7312	PG 41

HL7354	PG 35	NS225	PG 11
HL7354.800SP	PG 42	NS226	PG 11
HL7354/2.800	PG 42	NS227	PG 11
HL7354-2B	PG 35	NS230	PG 11
HL7354-2P	PG 35	OG-LED1200, 1500	PG 13
HL7354SP	PG 43	P60C	PG 36
HL7355	PG 35	PDB25-1600	PG 18
HL7356SP	PG 43	PL5012	PG 53
HL7472	PG 39	POP	PG 38
HL75	PG 37	PR19	PG 53
HL8403.600 - 900	PG 46	PR90ST	PG 30
HSP203	PG 15	PT115	PG 10
HSP2810	PG 15	PT227	PG 10
HSP286	PG 15	RD07B	PG 48
HSP287	PG 15	SA215	PG 14
HSP294100	PG 15	SA294C8W	PG 14
HSP294400	PG 15	SA294CD-13W	PG 14
HSP295	PG 15	SA294CR	PG 14
HSP37	PG 15	SA8530	PG 50
HW119	PG 50	SL3301	PG 30
HW1205E	PG 50	SL3302	PG 30
HW1206	PG 50	SP607	PG 42
HW128	PG 50	SR800D	PG 14
HW1331	PG 50	TL66	PG 19
HW1440	PG 50	UCL67	PG 49
HW56	PG 50	UHB200	PG 53
HW5800	PG 50	UHB200-PD	PG 53
IK1111	PG 31	UHB200-SHADE	PG 53
IL1105C	PG 40	UL2700	PG 33
IL1105D	PG 40	UL2701	PG 33
IL1105EYE	PG 39	UL3400	PG 12/31
IL1105H	PG 40	UL4101	PG 32
IL1105H	PG 40	UL4102	PG 32
IL1105H	PG 40	UL6640	PG 37
IL1106	PG 40	UL6650	PG 37
IL2405	PG 41	UL7710	PG 32
IL3104	PG 39	UL7715	PG 32
IL3108	PG 41	UL7720	PG 32
KIT1271	PG 37	UL9400	PG 39
KIT1273	PG 37	UL9500	PG 39
KL1O4927	PG 38	UL9600	PG 39
LDL1927	PG 28	UL9700	PG 39
LDL68	PG 28	VA506	PG 33
LDL-C01	PG 28	W1705	PG 24
LDL-E01	PG 28	W1800D	PG 24
LDL-W01	PG 28	W1933	PG 26
LS2555	PG 18	W1934D	PG 24
LS3580	PG 18	W50	PG 24
LS5080	PG 19	W60	PG 24
MB113	PG 25	W633	PG 25
MB537	PG 25	W641	PG 26
MB542	PG 25	W70	PG 24
MB550	PG 26	WS372B	PG 17
MB666	PG 26	WS373B	PG 17
MB704	PG 25	WS374B	PG 17
MB709	PG 26	WS37MBP	PG 17
NS207	PG 11/52	WS37SW	PG 17
NS208-25W	PG 52		
NS214	PG 7		
NS215	PG 11		
NS215B	PG 11		
NS216	PG 11		
NS221	PG 11		

INDEX BY NAME

AHUROA	PG 37	HOKIANGA	PG 46
AKAROA	PG 39	HOKITIKA	PG 44
ALBANY	PG 11	HUNTER	PG 31/36
ALEXANDRA	PG 33	HUNTLY	PG 42
AMBERLEY	PG 38	HUNUA	PG 19
ANAKIWA	PG 43	INVERCARGILL	PG 49
AOTEA	PG 49	JOHNSONVILLE	PG 53
ARAWA	PG 49	KAEO	PG 13
ARROWTOWN	PG 33	KAIAPOI	PG 7
ARUNDEL	PG 36	KAIKOURA	PG 6
AVALON	PG 6	KAIPARA	PG 45
BALCLUTHA	PG 35	KAPITI	PG 50
BALFOUR	PG 34	KARAKA	PG 31
BELMONT	PG 41	KARAMEA	PG 7
BENMORE	PG 5/30	KARAPIRO	PG 15
BLENHEIM	PG 50	KAREKARE	PG 24
BLUFF	PG 9	KARORI	PG 50
BRETT	PG 39	KARETU	PG 18
BULLER	PG 6	KAWHIA	PG 7
CALUZZI	PG 37	KERKERI	PG 46
CAMBRIDGE	PG 41	KINGSTON	PG 33
CARDRONA	PG 34	KLIO	PG 38
CHATHAM	PG 50	KUMARA	PG 39
CHEVIOT	PG 38	KUROW	PG 8
CLARKS BEACH	PG 15	LINCOLN	PG 6
CLEVEDON	PG 18	LINTON	PG 6
CLYDE	PG 35	LISMORE	PG 36
CLYDEVALE	PG 35	LUGGATE	PG 43
COACH	PG 38	LUIGI	PG 37
COROGLEN	PG 5	LUMSDEN	PG 33
CORONET	PG 25	MAHIA	PG 48
CROMWELL	PG 8	MAKARORA	PG 5
DALEFIELD	PG 33	MAKETU	PG 40
DANNEVIRKE	PG 26	MANAPOURI	PG 35
DARFIELD	PG 37	MANAWATU	PG 28
DENNISTON	PG 32	MANDEVILLE	PG 34
DIPTON	PG 34	MANGAWHAI	PG 25
DRURY	PG 45	MANGONUI	PG 10
DUNSANDEL	PG 38	MANLY	PG 46
DUNSTAN	PG 5/30	MAPUA	PG 53
EGMONT	PG 28	MATAKANA	PG 19
FAIRLIE	PG 36	MATANGI	PG 50
FITZROY	PG 14	MATAPOURI	PG 33
FLAGSTAFF	PG 50	MATARANGI	PG 11
FLORENCE	PG 38	MATATA	PG 39
FOXTON	PG 7	MATAURA	PG 34
GERALDINE	PG 36	MATAURI	PG 12/31
GISBORNE	PG 15	MAYFIELD	PG 36
GLEN AFTON	PG 40	MCKENZIE	PG 4
GLENBROOK	PG 31	MERCER	PG 42
GRANITY	PG 43	METHVEN	PG 37
GREERTON	PG 40	MILFORD	PG 8
HAAST	PG 6	MILTON	PG 26
HAHEI	PG 30	MOHAKA	PG 48
HANMER	PG 43	MOKOHINAU	PG 19
HAREWOOD	PG 38	MONOWAI	PG 15
HAURAKI	PG 32	MOSGIEL	PG 41
HAWEA	PG 49	MOSSBURN	PG 34
HAWERA	PG 15	MOTU	PG 31/48
HERIOT	PG 33	MOTUEKA	PG 53
HERMITAGE	PG 25	MOUTERE	PG 43
HIKURANGI	PG 12	MURCHISON	PG 32

MURIWAI	PG 5/27	SPRINGFIELD	PG 12
NASEBY	PG 24	STRATFORD	PG 26
NELSON	PG 6	SUMNER	PG 32
NEWSTEAD	PG 32	TAIERI	PG 53
NGAROTO	PG 26	TAIPA	PG 39
NGATEA	PG 11	TAIRUA	PG 51
OAMARU	PG 8	TAKAKA	PG 43
OBAN	PG 50	TAKAPUNA	PG 42
OHOKA	PG 39	TAMAHERE	PG 42
OHOE	PG 40	TAPORA	PG 14
OKAREKA	PG 17	TARAWERA	PG 17
OKATAINA	PG 17	TAROTO	PG 11
OMAHA	PG 28	TARRAS	PG 8
OMANA	PG 12/31	TASMAN	PG 4
OMARAMA	PG 24	TAUPO	PG 4
OPUA	PG 51	TAWA	PG 53
ORETI	PG 32	TE AKAU	PG 30
OTIRA	PG 44	TE ANAU	PG 8
OXFORD	PG 24/37	TE HANA	PG 11
PAKIRI	PG 50	TE KOUMA	PG 5
PANGURU	PG 13	TE KUITI	PG 39
PENCARROW	PG 39	TE PUKE	PG 40
PETONE	PG 15	TE PUNA	PG 42
PICTON	PG 5	TEKAPO	PG 24
PIHA	PG 24	THAMES	PG 30
PIPIWAI	PG 13	THORNDON	PG 25
PIRONGIA	PG 42	TIKIPUNGA	PG 12
POKENO	PG 30	TIMARU	PG 8
PONUI	PG 49	TIRI	PG 49
PORIRUA	PG 53	TITOKI	PG 12/31
PORONUI	PG 52	TOKOMARU	PG 49
PORTLAND	PG 24	TONGARIRO	PG 28
PUHOI	PG 11/52	TRYPHENA	PG 13
PUKEKOHE	PG 30	TUAKAU	PG 14
PUKETI	PG 35	TUAPEKA	PG 34
PUPUKE	PG 53	TURANGI	PG 49
RAETAHI	PG 41	WAIAKE	PG 39
RAGLAN	PG 7	WAIANIWA	PG 6
RAKINO	PG 49	WAIHI	PG 15
RANFURLY	PG 11	WAIKAKA	PG 34
RANGIORA	PG 37	WAIKARI	PG 13
RANGIRIRI	PG 14	WAIMATE	PG 25
RAWENE	PG 48	WAIOURU	PG 4
REEFTON	PG 6	WAIPU	PG 46
RICHMOND	PG 53	WAITANGI	PG 51
RIVERSDALE	PG 34	WAITEMATA	PG 50
ROLLESTON	PG 37	WAITOKI	PG 48
RONALDO	PG 37	WAITOMO	PG4
ROTOITI	PG 17	WAIUKU	PG 14
ROTORUA	PG 17	WAIWERA	PG 27
ROUTEBURN	PG 28	WAKEFIELD	PG 18
ROXBURGH	PG 26	WANAKA	PG 8
RUAKAKA	PG 10	WARKWORTH	PG 27
RUAKURA	PG 53	WELLINGTON	PG 4
RUAPUNA	PG 36	WELLSFORD	PG 11
RUATOKI	PG 48	WESTPORT	PG 8
RUATORIA	PG 15	WHANGAMATA	PG 5/30
RUAWAI	PG 11	WHITIANGA	PG 5
RUSSELL	PG 51	WINTON	PG 35
SILVERDALE	PG 45	WOODBURY	PG 36
SPOTSWOOD	PG 40		

Warranty & Lighting Design

Lighting Design Solutions

Our experienced lighting designers create stunning spaces through innovative lighting solutions.

From residential to commercial projects, we provide detailed plans, which include fixture selection, placement, and project scheduling. With our support, we can help transform your projects with lighting designs that impress.

Find out more on our website
prolux.co.nz



Prolux Lighting 5 Year Warranty

Thank you for choosing Prolux Lighting for your lighting needs. We are committed to providing high-quality and reliable lighting solutions and we back our products with a 5-year warranty to ensure your satisfaction.

See our website for our full warranty policy.



prolux[™]
lighting